


# PN 02 AOL 90 / PN 02 AOS 90

Swage nipple, DKOL angle 90° / DKOS angle 90°

## Properties

|                       |                            |
|-----------------------|----------------------------|
| <b>Application</b>    | Measuring equipment        |
| <b>Connection 1</b>   | metric nut thread          |
| <b>Sealing form 1</b> | 24° outer cone with O-ring |
| <b>Short code</b>     | DKOL                       |
| <b>Standard</b>       | ISO 8434-1                 |
| <b>Material</b>       | Steel                      |
| <b>Surface</b>        | electro galvanised         |

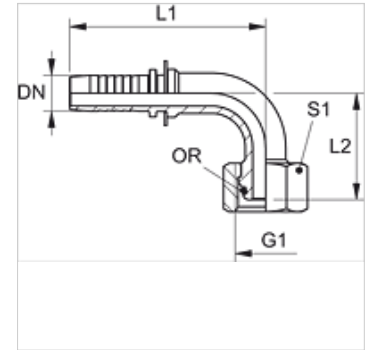

## Note

Appropriate ferrule: PMH 102.

## Item

| Identification  | DN | Size | Inches | Series | for external pipe Ø<br>(mm) | G1         | L1<br>(mm) | L2<br>(mm) | S1 | OR        |
|-----------------|----|------|--------|--------|-----------------------------|------------|------------|------------|----|-----------|
| PN 02 AOL 04 90 | 2  | 1    | 5/64"  | L      | 6                           | M 12 x 1.5 | 35,5       | 27         | 14 | 4.0 x 1.5 |
| PN 02 AOL 06 90 | 2  | 1    | 5/64"  | L      | 8                           | M 14 x 1.5 | 38,0       | 30         | 17 | 6.0 x 1.5 |
| PN 02 AOL 08 90 | 2  | 1    | 5/64"  | L      | 10                          | M 16 x 1.5 | 41,5       | 40         | 19 | 7.5 x 1.5 |
| PN 02 AOS 03 90 | 2  | 1    | 5/64"  | S      | 6                           | M 14 x 1.5 | 35,5       | 27         | 17 | 4.0 x 1.5 |
| PN 02 AOS 04 90 | 2  | 1    | 5/64"  | S      | 8                           | M 16 x 1.5 | 38,0       | 30         | 19 | 6.0 x 1.5 |
| PN 02 AOS 06 90 | 2  | 1    | 5/64"  | S      | 10                          | M 18 x 1.5 | 41,5       | 40         | 22 | 7.5 x 1.5 |

DN = Nominal diameter, nominal width – Series: LL = Very light L = Light S = Heavy