
# PN 02 FL 45

Swage nipple, BEL angle 45°

## Properties

| | |
|---|---|
| **Application** | Measuring equipment |
| **Series** | light |
| **Connection 1** | Pipe sockets |
| **Sealing form 1** | Cutting ring connection |
| **Short code** | BEL |
| **Standard** | ISO 8434-1 |
| **Material** | Steel |
| **Surface** | electro galvanised |



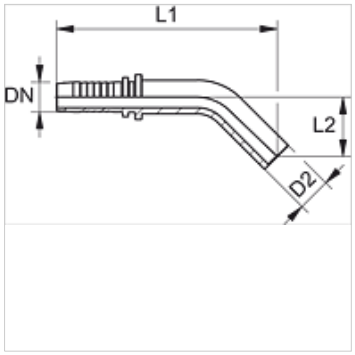


## Note

Appropriate ferrule: PMH 102.
Do not use for new designs; we recommend: PN 02 AOL...45.
Final cutting ring assembly must be carried out in the hardened pre-assembly socket (VOM...).

## Item

| Identification | DN | Size | Inches | Ø D2 (mm) | L1 (mm) | L2 (mm) |
|---|---|---|---|---|---|---|
| **PN 02 FL 45** | 2 | 1 | 5/64" | 4,0 | 43 | 14,5 |
| **PN 02 FL 04 45** | 2 | 1 | 5/64" | 6,0 | 44 | 16,5 |
| **PN 02 FL 06 45** | 2 | 1 | 5/64" | 8,0 | 52 | 20,0 |

DN = Nominal diameter, nominal width

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*