


# PN A

Swage nipple, DKM

**HANSA FLEX**

## Properties

<b>Application</b>	Swage nipple for HD 100 to HD 400, KP and TE hoses
<b>Connection 1</b>	metric nut thread
<b>Sealing form 1</b>	60° sealing head
<b>Short code</b>	DKM
<b>Standard</b>	DIN 3863
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

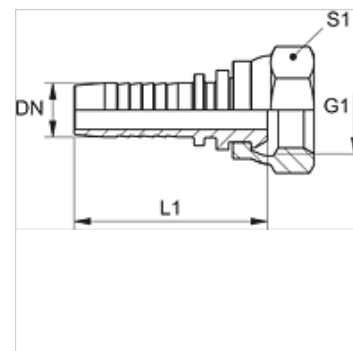

## Note

Choose the appropriate ferrule based on the hose type.

Item								
Identification	DN	Size	Inches	Operating pressure (bar)	G1	L1 (mm)	S1	
PN 20 A	19	12	3/4"	63,0	M 30 x 1.5	65,5	36	
PN 25 A	25	16	1"	63,0	M 38 x 1.5	75,5	46	
PN 25 A 32	25	16	1"	63,0	M 45 x 1.5	76,0	50	
PN 32 A	31	20	1.1/4"	63,0	M 45 x 1.5	85,0	50	
PN 40 A	38	24	1.1/2"	63,0	M 52 x 1.5	89,0	60	
PN 50 A	51	32	2"	40,0	M 65 x 2	107,0	75	
PN 60 A	60	40	2.3/8"	40,0	M 78 x 2	112,0	90	

## Product versions

PN A VA	Swage nipple, DKM, Stainless steel
---------	------------------------------------