


PN A 45

Swage nipple, DKM angle 45°

HANSA FLEX

Properties

Application	Swage nipple for HD 100 to HD 400, KP and TE hoses
Connection 1	metric nut thread
Sealing form 1	60° sealing head
Short code	DKM
Standard	DIN 3863
Material	Steel
Surface	electro galvanised

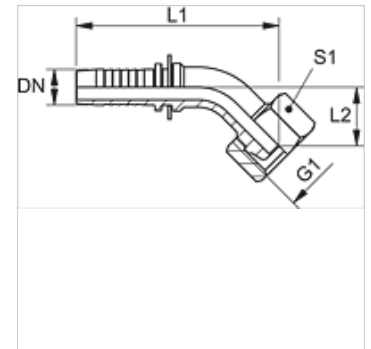

Note

Choose the appropriate ferrule based on the hose type.

Item

Identification	DN	Size	Inches	Operating pressure (bar)	G1	L1 (mm)	L2 (mm)	S1
PN 20 A 45	19	12	3/4"	63,0	M 30 x 1.5	119,0	29,0	36
PN 25 A 45	25	16	1"	63,0	M 38 x 1.5	148,0	39,0	46
PN 32 A 45	31	20	1.1/4"	63,0	M 45 x 1.5	-	-	-
PN 40 A 45	38	24	1.1/2"	63,0	M 52 x 1.5	172,0	44,0	60
PN 50 A 45	51	32	2"	40,0	M 65 x 2	209,0	53,0	75

Product versions

PN A 45 VA Swage nipple, DKM angle 45°, Stainless steel