


PN AFL 45 VA

Swage nipple, DKL angle 45°

HANSA FLEX

Properties

| | |
|-----------------------|--|
| Application | Swage nipple for HD 100 to HD 400, KP and TE hoses |
| Connection 1 | metric nut thread |
| Sealing form 1 | 24°/60° Universal sealing head |
| Short code | DKL |
| Series | light |
| Material | Stainless steel |

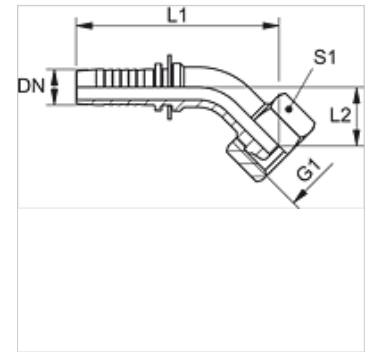

Note

Choose the appropriate ferrule based on the hose type.

Item

| Identification | DN | Size | Inches | Operating pressure (bar) | G1 | for external pipe Ø (mm) | L1 (mm) | L2 (mm) | S1 |
|--------------------|----|------|--------|--------------------------|------------|--------------------------|---------|---------|----|
| PN 06 AFL 04 45 VA | 6 | 4 | 1/4" | 250,0 | M 12 x 1.5 | 6 | 66,8 | 14,0 | 14 |
| PN 06 AFL 45 VA | 6 | 4 | 1/4" | 250,0 | M 14 x 1.5 | 8 | 64,8 | 14,5 | 17 |
| PN 08 AFL 45 VA | 8 | 5 | 5/16" | 250,0 | M 16 x 1.5 | 10 | 70,8 | 17,0 | 19 |
| PN 10 AFL 45 VA | 10 | 6 | 3/8" | 250,0 | M 18 x 1.5 | 12 | 73,3 | 18,5 | 22 |
| PN 13 AFL 45 VA | 12 | 8 | 1/2" | 250,0 | M 22 x 1.5 | 15 | 84,8 | 19,0 | 27 |
| PN 16 AFL 45 VA | 16 | 10 | 5/8" | 160,0 | M 26 x 1.5 | 18 | 93,0 | 23,0 | 32 |
| PN 20 AFL 45 VA | 19 | 12 | 3/4" | 160,0 | M 30 x 2 | 22 | 107,0 | 25,0 | 36 |
| PN 25 AFL 45 VA | 25 | 16 | 1" | 100,0 | M 36 x 2 | 28 | 132,5 | 32,0 | 41 |
| PN 32 AFL 45 VA | 31 | 20 | 1.1/4" | 100,0 | M 45 x 2 | 35 | 162,0 | 36,5 | 50 |
| PN 40 AFL 45 VA | 38 | 24 | 1.1/2" | 100,0 | M 52 x 2 | 42 | 173,0 | 43,5 | 60 |

Product versions

PN AFL 45 Swage nipple, DKL angle 45°, Steel