


PN AFL 90

Swage nipple, DKL angle 90°

HANSA FLEX

Properties

Application	Swage nipple for HD 100 to HD 400, KP and TE hoses
Connection 1	metric nut thread
Sealing form 1	24°/60° Universal sealing head
Short code	DKL
Series	light
Material	Steel
Surface	electro galvanised

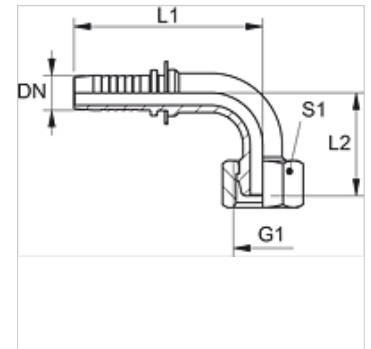

Note

Choose the appropriate ferrule based on the hose type.

Item

Identification	DN	Size	Inches	Operating pressure (bar)	G1	for external pipe Ø (mm)	L1 (mm)	L2 (mm)	S1
PN 04 AFL 90	5	3	3/16"	250,0	M 12 x 1.5	6	48,5	29,0	14
PN 06 AFL 04 90	6	4	1/4"	250,0	M 12 x 1.5	6	57,0	30,5	14
PN 06 AFL 90	6	4	1/4"	250,0	M 14 x 1.5	8	55,0	30,0	17
PN 06 AFL 08 90	6	4	1/4"	250,0	M 16 x 1.5	10	55,0	31,0	19
PN 06 AFL 10 90	6	4	1/4"	250,0	M 18 x 1.5	12	62,5	35,0	22
PN 08 AFL 90	8	5	5/16"	250,0	M 16 x 1.5	10	58,0	30,0	19
PN 08 AFL 10 90	8	5	5/16"	250,0	M 18 x 1.5	12	58,0	30,5	22
PN 10 AFL 08 90	10	6	3/8"	250,0	M 16 x 1.5	10	63,0	38,0	19
PN 10 AFL 90	10	6	3/8"	250,0	M 18 x 1.5	12	64,0	35,0	22
PN 10 AFL 13 90	10	6	3/8"	250,0	M 22 x 1.5	15	64,0	35,5	27
PN 13 AFL 90	12	8	1/2"	250,0	M 22 x 1.5	15	72,5	39,5	27
PN 13 AFL 16 90	12	8	1/2"	160,0	M 26 x 1.5	18	83,5	49,5	32
PN 16 AFL 13 90	16	10	5/8"	160,0	M 22 x 1.5	15	87,0	49,5	27
PN 16 AFL 90	16	10	5/8"	160,0	M 26 x 1.5	18	88,0	49,5	32
PN 20 AFL 90	19	12	3/4"	160,0	M 30 x 2	22	99,5	54,5	36
PN 25 AFL 90	25	16	1"	100,0	M 36 x 2	28	127,0	66,0	41
PN 32 AFL 90	31	20	1.1/4"	100,0	M 45 x 2	35	151,5	82,0	50
PN 40 AFL 90	38	24	1.1/2"	100,0	M 52 x 2	42	176,5	95,0	60

Product versions

PN AFL 90 VA Swage nipple, DKL angle 90°, Stainless steel