


PN AFS

Swage nipple, DKS

Properties

Application	Swage nipple for HD 100 to HD 400, KP and TE hoses
Connection 1	metric nut thread
Sealing form 1	24°/60° Universal sealing head
Short code	DKS
Series	heavy
Material	Steel
Surface	electro galvanised

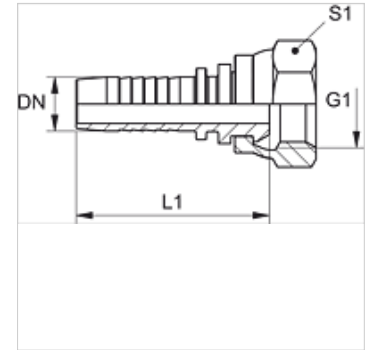

Note

Choose the appropriate ferrule based on the hose type.

Item	Identification	DN	Size	Inches	Operating pressure (bar)	G1	for external pipe Ø (mm)	L1 (mm)	S1
PN 04 AFS 03	PN 04 AFS 03	5	3	3/16"	630,0	M 14 x 1.5	6	44,5	17
PN 04 AFS	PN 04 AFS	5	3	3/16"	630,0	M 16 x 1.5	8	44,5	19
PN 06 AFS 04	PN 06 AFS 04	6	4	1/4"	630,0	M 16 x 1.5	8	51,5	19
PN 06 AFS	PN 06 AFS	6	4	1/4"	630,0	M 18 x 1.5	10	52,5	22
PN 08 AFS 06	PN 08 AFS 06	8	5	5/16"	630,0	M 18 x 1.5	10	52,5	22
PN 08 AFS	PN 08 AFS	8	5	5/16"	630,0	M 20 x 1.5	12	52,5	24
PN 10 AFS 08	PN 10 AFS 08	10	6	3/8"	630,0	M 20 x 1.5	12	54,0	24
PN 10 AFS	PN 10 AFS	10	6	3/8"	630,0	M 22 x 1.5	14	57,0	27
PN 13 AFS	PN 13 AFS	12	8	1/2"	400,0	M 24 x 1.5	16	58,0	30
PN 16 AFS	PN 16 AFS	16	10	5/8"	400,0	M 30 x 2	20	66,0	36
PN 20 AFS	PN 20 AFS	19	12	3/4"	400,0	M 36 x 2	25	75,5	46
PN 25 AFS	PN 25 AFS	25	16	1"	250,0	M 42 x 2	30	85,5	50
PN 32 AFS	PN 32 AFS	31	20	1.1/4"	250,0	M 52 x 2	38	98,0	60