
PN AFS
Swage nipple, DKS

Properties

Application	Swage nipple for HD 100 to HD 400, KP and TE hoses
Connection 1	metric nut thread
Sealing form 1	24°/60° Universal sealing head
Short code	DKS
Series	heavy
Material	Steel
Surface	electro galvanised



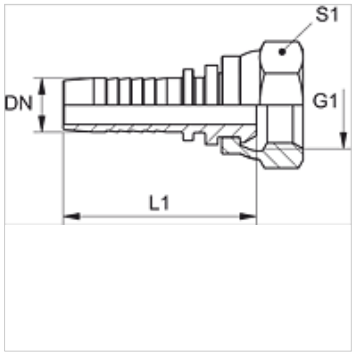

Note

Choose the appropriate ferrule based on the hose type.

Item

Identification	DN	Size	Inches	Operating pressure (bar)	G1	for external pipe Ø (mm)	L1 (mm)	S1
PN 04 AFS 03	5	3	3/16"	630,0	M 14 x 1.5	6	44,5	17
PN 04 AFS	5	3	3/16"	630,0	M 16 x 1.5	8	44,5	19
PN 06 AFS 04	6	4	1/4"	630,0	M 16 x 1.5	8	51,5	19
PN 06 AFS	6	4	1/4"	630,0	M 18 x 1.5	10	52,5	22
PN 08 AFS 06	8	5	5/16"	630,0	M 18 x 1.5	10	52,5	22
PN 08 AFS	8	5	5/16"	630,0	M 20 x 1.5	12	52,5	24
PN 10 AFS 08	10	6	3/8"	630,0	M 20 x 1.5	12	54,0	24
PN 10 AFS	10	6	3/8"	630,0	M 22 x 1.5	14	57,0	27
PN 13 AFS	12	8	1/2"	400,0	M 24 x 1.5	16	58,0	30
PN 16 AFS	16	10	5/8"	400,0	M 30 x 2	20	66,0	36
PN 20 AFS	19	12	3/4"	400,0	M 36 x 2	25	75,5	46
PN 25 AFS	25	16	1"	250,0	M 42 x 2	30	85,5	50
PN 32 AFS	31	20	1.1/4"	250,0	M 52 x 2	38	98,0	60

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.