


PN AFS 90

Swage nipple, DKS angle 90°

HANSA FLEX

Properties

| | |
|-----------------------|--|
| Application | Swage nipple for HD 100 to HD 400, KP and TE hoses |
| Connection 1 | metric nut thread |
| Sealing form 1 | 24°/60° Universal sealing head |
| Short code | DKS |
| Series | heavy |
| Material | Steel |
| Surface | electro galvanised |

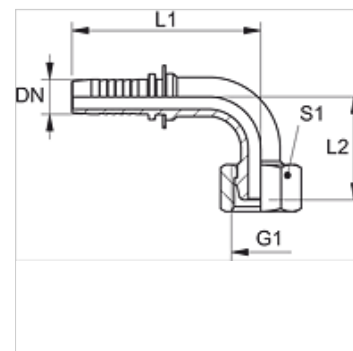

Note

Choose the appropriate ferrule based on the hose type.

| Item | | | | | | | | | | |
|-----------------|----|------|--------|-----------------------------|------------|-----------------------------|------------|------------|----|--|
| Identification | DN | Size | Inches | Operating pressure (bar) | G1 | for external pipe Ø (mm) | L1 (mm) | L2 (mm) | S1 | |
| PN 06 AFS 04 90 | 6 | 4 | 1/4" | 630,0 | M 16 x 1.5 | 8 | 63,0 | 35,0 | 19 | |
| PN 08 AFS 90 | 8 | 5 | 5/16" | 630,0 | M 20 x 1.5 | 12 | - | - | - | |