


PN AJF 45

Swage nipple, ORFS angle 45°

HANSA FLEX

Properties

Application	Swage nipple for HD 100 to HD 400, KP and TE hoses
Connection 1	UN/UNF nut threads
Sealing form 1	flat sealing
Short code	ORFS
Standard	ISO 8434-3
Material	Steel
Surface	electro galvanised

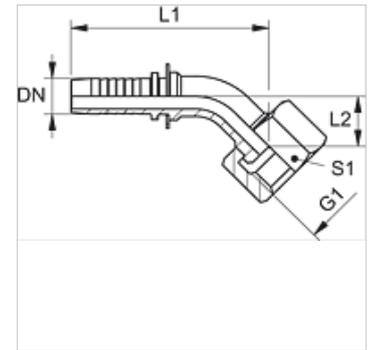

Note

Choose the appropriate ferrule based on the hose type.

Item

Identification	DN	Size	Inches	Operating pressure (bar)	G1	L1 (mm)	L2 (mm)	S1
PN 06 AJF 45	6	4	1/4"	413,0	9/16"-18 UNF	60,0	12,0	17
PN 06 AJF 45 L10	6	4	1/4"	413,0	9/16"-18 UNF	60,0	10,0	17
PN 06 AJF 10 45	6	4	1/4"	413,0	11/16" -16 UN	61,0	13,5	22
PN 08 AJF 10 45	8	5	5/16"	413,0	11/16" -16 UN	80,0	21,0	22
PN 08 AJF 10 45 L11	8	5	5/16"	413,0	11/16" -16 UN	80,0	11,0	22
PN 10 AJF 45	10	6	3/8"	413,0	11/16" -16 UN	69,0	16,0	22
PN 10 AJF 45 L11	10	6	3/8"	413,0	11/16" -16 UN	69,0	11,0	22
PN 10 AJF 13 45	10	6	3/8"	413,0	13/16" -16 UN	69,5	16,5	24
PN 13 AJF 10 45 L13	12	8	1/2"	413,0	11/16" -16 UN	78,0	13,0	22
PN 13 AJF 45	12	8	1/2"	413,0	13/16" -16 UN	78,0	17,0	24
PN 13 AJF 45 L15	12	8	1/2"	413,0	13/16" -16 UN	78,0	15,0	24
PN 13 AJF 16 45	12	8	1/2"	413,0	1" -14 UNS	80,5	19,5	30
PN 16 AJF 45	16	10	5/8"	413,0	1" -14 UNS	93,5	22,5	30
PN 16 AJF 45 L16	16	10	5/8"	413,0	1" -14 UNS	93,5	16,0	30
PN 20 AJF 16 45 L21	19	12	3/4"	413,0	1" -14 UNS	104,0	21,0	30
PN 20 AJF 45	19	12	3/4"	413,0	1.3/16" -12 UN	104,0	25,0	36
PN 20 AJF 45 L21	19	12	3/4"	413,0	1.3/16" -12 UN	104,0	21,0	36
PN 20 AJF 25 45 L21	19	12	3/4"	413,0	1.7/16" -12 UN	104,0	21,0	36
PN 25 AJF 45	25	16	1"	413,0	1.7/16" -12 UN	130,5	27,5	41
PN 25 AJF 45 L24	25	16	1"	413,0	1.7/16" -12 UN	130,5	24,0	41
PN 32 AJF 45	31	20	1.1/4"	275,0	1.11/16" -12 UN	155,0	34,0	50
PN 40 AJF 45	38	24	1.1/2"	275,0	2" -12 UN	177,0	38,0	60