


PN AOBK 90

Swage nipple, DKOR Comp. angle 90°

HANSA FLEX

Properties

Application	Swage nipple for HD 100 to HD 400, KP and TE hoses
Connection 1	BSP nut thread
Sealing form 1	60° outer cone with O-ring
Construction type	Compact form
Short code	DKOR
Standard	BS 5200
Material	Steel
Surface	electro galvanised

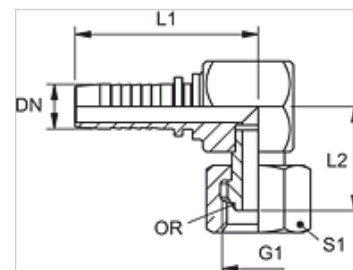

Note

Choose the appropriate ferrule based on the hose type.

Item									
Identification	DN	Size	Inches	Operating pressure (bar)	G1	L1 (mm)	L2 (mm)	S1	OR
PN 06 AOBK 90	6	4	1/4"	400,0	G 1/4" -19	46,0	22,5	19	6.0 x 1.0
PN 10 AOBK 90	10	6	3/8"	400,0	G 3/8" -19	50,0	27,0	22	8.1 x 1.6
PN 13 AOBK 90	12	8	1/2"	350,0	G 1/2" -14	54,5	28,5	27	12.1 x 1.6
PN 16 AOBK 90	16	10	5/8"	350,0	G 5/8" -14	-	-	-	14.1 x 1.6
PN 20 AOBK 90	19	12	3/4"	315,0	G 3/4" -14	68,5	38,5	32	22.1 x 1.6
PN 25 AOBK 90	25	16	1"	250,0	G 1" -11	-	-	-	22.1 x 1.6