


PN AOL 45 VA

Swage nipple, DKOL angle 45°

HANSA FLEX

Properties

Application	Swage nipple for HD 100 to HD 400, KP and TE hoses
Connection 1	metric nut thread
Sealing form 1	24° outer cone with O-ring
Short code	DKOL
Standard	ISO 8434-1
Series	light
Material	Stainless steel

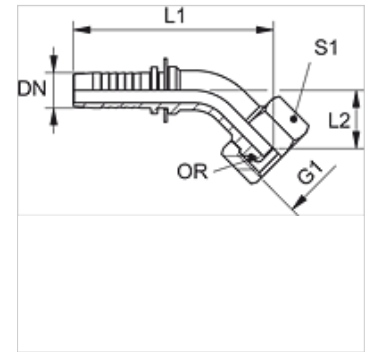

Note

Choose the appropriate ferrule based on the hose type.

Ordering information

Seals of NBR

FPM (Viton) on request

Item

Identification	DN	Size	Inches	G1	for external pipe Ø (mm)	L1 (mm)	L2 (mm)	S1	OR
PN 06 AOL 04 45 VA	6	4	1/4"	M 12 x 1.5	6	66,8	17,0	14	4.0 x 1.5
PN 06 AOL 45 VA	6	4	1/4"	M 14 x 1.5	8	68,3	16,5	17	6.0 x 1.5
PN 06 AOL 08 45 VA	6	4	1/4"	M 16 x 1.5	10	68,3	16,5	19	7.5 x 1.5
PN 06 AOL 10 45 VA	6	4	1/4"	M 18 x 1.5	12	71,8	19,5	22	9.0 x 1.5
PN 08 AOL 06 45 VA	8	5	5/16"	M 14 x 1.5	8	80,8	26,0	17	6.0 x 1.5
PN 08 AOL 45 VA	8	5	5/16"	M 16 x 1.5	10	74,3	19,0	19	7.5 x 1.5
PN 08 AOL 10 45 VA	8	5	5/16"	M 18 x 1.5	12	74,3	19,0	22	9.0 x 1.5
PN 10 AOL 08 45 VA	10	6	3/8"	M 16 x 1.5	10	75,3	20,0	19	7.5 x 1.5
PN 10 AOL 45 VA	10	6	3/8"	M 18 x 1.5	12	73,3	18,5	22	9.0 x 1.5
PN 10 AOL 13 45 VA	10	6	3/8"	M 22 x 1.5	15	83,3	21,5	27	12.0 x 2.0
PN 13 AOL 10 45 VA	12	8	1/2"	M 18 x 1.5	12	94,3	27,5	22	9.0 x 1.5
PN 13 AOL 45 VA	12	8	1/2"	M 22 x 1.5	15	86,3	20,5	27	12.0 x 2.0
PN 13 AOL 16 45 VA	12	8	1/2"	M 26 x 1.5	18	92,3	23,5	32	15.0 x 2.0
PN 16 AOL 45 VA	16	10	5/8"	M 26 x 1.5	18	99,0	26,5	32	15.0 x 2.0
PN 16 AOL 20 45 VA	16	10	5/8"	M 30 x 2	22	125,5	36,5	36	20.0 x 2.0
PN 20 AOL 45 VA	19	12	3/4"	M 30 x 2	22	107,0	28,0	36	20.0 x 2.0
PN 20 AOL 25 45 VA	19	12	3/4"	M 36 x 2	28	-	-	41	26.0 x 2.0
PN 25 AOL 45 VA	25	16	1"	M 36 x 2	28	135,5	33,0	41	26.0 x 2.0
PN 32 AOL 45 VA	31	20	1.1/4"	M 45 x 2	35	162,0	44,0	50	32.0 x 2.5
PN 40 AOL 45 VA	38	24	1.1/2"	M 52 x 2	42	173,0	48,0	60	38.0 x 2.5

Product versions

PN AOL 45 Swage nipple, DKOL angle 45°, Steel