


PN AR 90 VA

Swage nipple, DKR-Flat angle 90°

HANSA FLEX

Properties

Application	Swage nipple for HD 100 to HD 400, KP and TE hoses
Connection 1	BSP nut thread
Sealing form 1	flat sealing
Short code	DKR flat
Material	Stainless steel

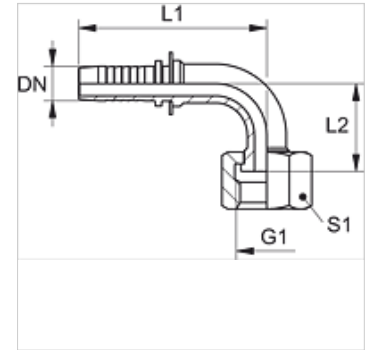

Note

Choose the appropriate ferrule based on the hose type.

Item

Identification	DN	Size	Inches	Operating pressure (bar)	G1	L2 (mm)	S1
PN 06 AR 02 90 VA	6	4	1/4"	350,0	G 1/8" -28	17,0	14
PN 06 AR 90 VA	6	4	1/4"	350,0	G 1/4" -19	25,0	17
PN 08 AR 10 90 VA	8	5	5/16"	350,0	G 3/8" -19	30,0	19
PN 10 AR 13 90 VA	10	6	3/8"	315,0	G 1/2" -14	36,0	27
PN 10 AR 90 VA	10	6	3/8"	350,0	G 3/8" -19	30,0	19
PN 13 AR 20 90 VA	12	8	1/2"	250,0	G 3/4" -14	47,0	32
PN 13 AR 90 VA	12	8	1/2"	315,0	G 1/2" -14	36,5	27
PN 16 AR 20 90 VA	16	10	5/8"	250,0	G 3/4" -14	20,5	32
PN 16 AR 90 VA	16	10	5/8"	315,0	G 5/8" -14	50,0	27
PN 20 AR 25 90 VA	19	12	3/4"	200,0	G 1" -11	51,0	41
PN 20 AR 90 VA	19	12	3/4"	250,0	G 3/4" -14	50,0	32
PN 25 AR 32 90 VA	25	16	1"	160,0	G 1.1/4" -11	76,0	50
PN 25 AR 90 VA	25	16	1"	200,0	G 1" -11	64,5	41
PN 32 AR 40 90 VA	31	20	1.1/4"	125,0	G 1.1/2" -11	98,0	55
PN 32 AR 90 VA	31	20	1.1/4"	160,0	G 1.1/4" -11	74,5	50
PN 40 AR 90 VA	38	24	1.1/2"	125,0	G 1.1/2" -11	95,0	55
PN 50 AR 90 VA	51	32	2"	80,0	G 2" -11	119,0	70

Product versions

PN AR 90 Swage nipple, DKR-Flat angle 90°, Steel