
PN B
Swage nipple, RGN

Properties

Application	Swage nipple for HD 100 to HD 400, KP and TE hoses
Connection 1	Banjo for metric hollow screw
Sealing form 1	Sealed by copper ring
Short code	RGN
Standard	DIN 7642
Material	Steel
Surface	electro galvanised



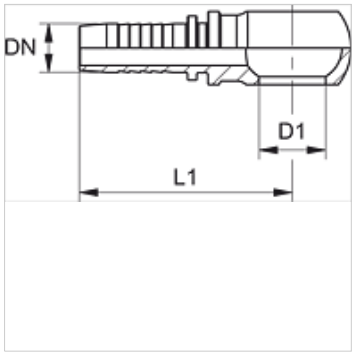

Note

Choose the appropriate ferrule based on the hose type.

Item

Identification	DN	Size	Inches	Operating pressure (bar)	D1 (mm)	for hollow screw	L1 (mm)
PN 04 B	5	3	3/16"	200,0	10,1	M 10	42,0
PN 06 B 02	6	4	1/4"	200,0	8,1	M 8	48,0
PN 06 B 04	6	4	1/4"	200,0	10,1	M 10	48,0
PN 06 B	6	4	1/4"	200,0	12,1	M 12	46,5
PN 06 B 08	6	4	1/4"	200,0	14,1	M 14	49,5
PN 06 B 10	6	4	1/4"	200,0	16,1	M 16	52,5
PN 08 B 04	8	5	5/16"	200,0	10,1	M 10	48,0
PN 08 B 06	8	5	5/16"	200,0	12,1	M 12	54,5
PN 08 B	8	5	5/16"	200,0	14,1	M 14	54,5
PN 08 B 10	8	5	5/16"	200,0	16,1	M 16	52,5
PN 08 B 13	8	5	5/16"	200,0	18,1	M 18	55,5
PN 10 B 08	10	6	3/8"	200,0	14,1	M 14	56,0
PN 10 B	10	6	3/8"	200,0	16,1	M 16	54,0
PN 10 B 13	10	6	3/8"	200,0	18,1	M 18	57,0
PN 13 B	12	8	1/2"	200,0	18,1	M 18	58,0
PN 13 B 16	12	8	1/2"	200,0	22,1	M 22	60,5
PN 16 B 13	16	10	5/8"	200,0	18,1	M 18	68,5
PN 16 B	16	10	5/8"	200,0	22,1	M 22	69,5
PN 16 B 20	16	10	5/8"	200,0	26,1	M 26	72,0
PN 20 B 16	19	12	3/4"	200,0	22,1	M 22	76,0
PN 20 B	19	12	3/4"	200,0	26,1	M 26	78,5
PN 20 B 25	19	12	3/4"	200,0	30,1	M 30	82,0
PN 25 B	25	16	1"	200,0	30,1	M 30	90,0

Product versions

PN B VA	Swage nipple, RGN, Stainless steel

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.