


# PN BR

## Swage nipple, RGN

### Properties

<b>Application</b>	Swage nipple for HD 100 to HD 400, KP and TE hoses
<b>Connection 1</b>	Banjo for imperial hollow screw
<b>Sealing form 1</b>	Sealed by copper ring
<b>Short code</b>	RNR
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

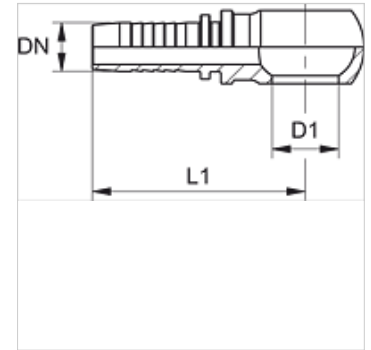

### Note

Choose the appropriate ferrule based on the hose type.

### Item

Identification	DN	Size	Inches	Operating pressure (bar)	D1 (mm)	for hollow screw	L1 (mm)
PN 04 BR	5	3	3/16"	200,0	10,1	R 1/8"	42,5
PN 04 BR 06	5	3	3/16"	200,0	13,2	R 1/4"	43,5
PN 06 BR 02	6	4	1/4"	200,0	10,1	R 1/8"	48,5
PN 06 BR	6	4	1/4"	200,0	13,2	R 1/4"	49,5
PN 06 BR 10	6	4	1/4"	200,0	16,7	R 3/8"	52,5
PN 08 BR 06	8	5	5/16"	200,0	13,2	R 1/4"	49,5
PN 08 BR 10	8	5	5/16"	200,0	16,7	R 3/8"	52,5
PN 10 BR 06	10	6	3/8"	200,0	13,2	R 1/4"	58,5
PN 10 BR	10	6	3/8"	200,0	16,7	R 3/8"	54,0
PN 10 BR 13	10	6	3/8"	200,0	21,0	R 1/2"	59,5
PN 13 BR 10	12	8	1/2"	200,0	16,7	R 3/8"	58,0
PN 13 BR	12	8	1/2"	200,0	21,0	R 1/2"	60,5
PN 13 BR 16	12	8	1/2"	200,0	23,0	R 5/8"	63,0
PN 16 BR	16	10	5/8"	200,0	23,0	R 5/8"	67,5
PN 16 BR 20	16	10	5/8"	200,0	26,5	R 3/4"	72,0
PN 20 BR	19	12	3/4"	200,0	26,5	R 3/4"	78,5
PN 20 BR 25	19	12	3/4"	200,0	33,3	R 1"	87,0
PN 25 BR	25	16	1"	200,0	33,3	R 1"	95,0