


PN HJOF

Swage nipple, ORFS

Properties

| | |
|-----------------------|--|
| Application | Swage nipple for HD 100 to HD 400, KP and TE hoses |
| Connection 1 | UN/UNF external threads |
| Sealing form 1 | flat seal with O-ring |
| Short code | ORFS |
| Standard | ISO 8434-3 |
| Material | Steel |
| Surface | electro galvanised |

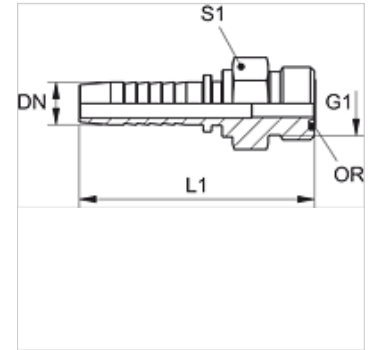

Note

Choose the appropriate ferrule based on the hose type.

Item

| Identification | DN | Size | Inches | G1 | L1 (mm) | S1 | OR |
|----------------|----|------|--------|-----------------|------------|----|--------------|
| PN 06 HJOF | 6 | 4 | 1/4" | 9/16" -18 UNF | 52,5 | 17 | 7.65 x 1.78 |
| PN 06 HJOF 10 | 6 | 4 | 1/4" | 11/16" -16 UN | 54,0 | 19 | 9.25 x 1.78 |
| PN 08 HJOF 10 | 8 | 5 | 5/16" | 11/16" -16 UN | 54,0 | 19 | 9.25 x 1.78 |
| PN 10 HJOF | 10 | 6 | 3/8" | 11/16" -16 UN | 56,0 | 19 | 9.25 x 1.78 |
| PN 10 HJOF 13 | 10 | 6 | 3/8" | 13/16" -16 UN | 58,5 | 22 | 12.42 x 1.78 |
| PN 10 HJOF 16 | 10 | 6 | 3/8" | 1" -14 UNS | 62,0 | 27 | 15.60 x 1.78 |
| PN 13 HJOF | 12 | 8 | 1/2" | 13/16" -16 UN | 60,0 | 22 | 12.42 x 1.78 |
| PN 13 HJOF 16 | 12 | 8 | 1/2" | 1" -14 UNS | 63,5 | 27 | 15.60 x 1.78 |
| PN 13 HJOF 20 | 12 | 8 | 1/2" | 1.3/16" -12 UN | 66,5 | 32 | 18.77 x 1.78 |
| PN 16 HJOF | 16 | 10 | 5/8" | 1" -14 UNS | 68,0 | 27 | 15.60 x 1.78 |
| PN 16 HJOF 20 | 16 | 10 | 5/8" | 1.3/16" -12 UN | 71,0 | 32 | 18.77 x 1.78 |
| PN 20 HJOF | 19 | 12 | 3/4" | 1.3/16" -12 UN | 78,0 | 32 | 18.77 x 1.78 |
| PN 20 HJOF 25 | 19 | 12 | 3/4" | 1.7/16" -12 UN | 82,5 | 41 | 23.52 x 1.78 |
| PN 25 HJOF | 25 | 16 | 1" | 1.7/16" -12 UN | 90,5 | 41 | 23.52 x 1.78 |
| PN 32 HJOF | 31 | 20 | 1.1/4" | 1.11/16" -12 UN | 101,5 | 46 | 29.87 x 1.78 |
| PN 40 HJOF | 38 | 24 | 1.1/2" | 2" -12 UN | 109,0 | 55 | 37.82 x 1.78 |