


# PN KAE STD

Swage nipple, KAE STD

## Properties

|                       |   |
|-----------------------|---|
| <b>Application</b>    | for HF/HW 100 and HF/HW 200 hoses             |
| <b>Connection 1</b>   | Rotating plug-in connection with ball bearing |
| <b>Sealing form 1</b> | O-ring sealed pin                             |
| <b>suitable for</b>   | Kärcher high pressure cleaners                |
| <b>Material</b>       | Steel   |
| <b>Surface</b>        | electro galvanised                            |

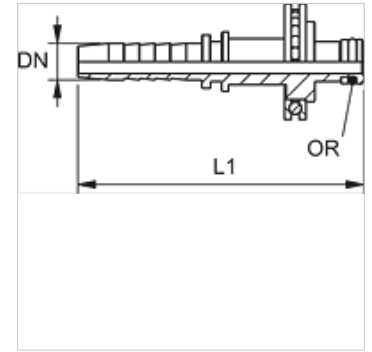

## Note

Not suitable for use as rotary fitting.  
Choose the appropriate ferrule based on the hose type.

## Description

Self-aligning to prevent torsional stress.

## Item

| Identification | DN | Size | Inches | D1<br>(mm) | OR          |
|----------------|----|------|--------|------------|-------------|
| PN 08 KAE STD  | 8  | 5    | 5/16"  | 11,0       | 7.65 x 1.78 |