


PN SF6 60

Swage nipple, SFS angle 60°

Properties

| | |
|-----------------------|--|
| Application | Swage nipple for HD 100 to HD 400, KP and TE hoses |
| Connection 1 | SAE flange connection 6000 PSI |
| Sealing form 1 | flat seal with SF O-ring |
| Short code | SFS |
| Standard | SAE J518 ISO 6162-2 |
| Material | Steel |
| Surface | electro galvanised |

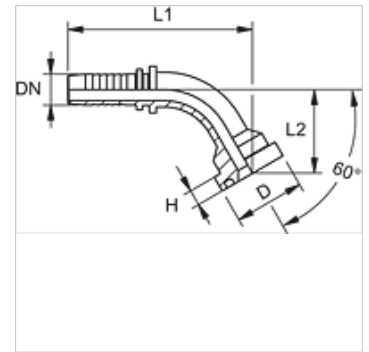

Note

Choose the appropriate ferrule based on the hose type.

Item

| Identification | DN | Size | Inches | Flange size | D (mm) | H (mm) | L1 (mm) | L2 (mm) |
|----------------------|----|------|--------|-------------|-----------|-----------|------------|------------|
| PN 20 SF6 25 60 L 80 | 19 | 12 | 3/4" | 1" | 47,6 | 9,5 | 141,0 | 80,0 |