


# PN SF6 90 VA

Swage nipple, SFS angle 90°

**HANSA FLEX**

## Properties

<b>Application</b>	Swage nipple for HD 100 to HD 400, KP and TE hoses
<b>Connection 1</b>	SAE flange connection 6000 PSI
<b>Sealing form 1</b>	flat seal with SF O-ring
<b>Short code</b>	SFS
<b>Standard</b>	SAE J518 ISO 6162-2
<b>Material</b>	Stainless steel

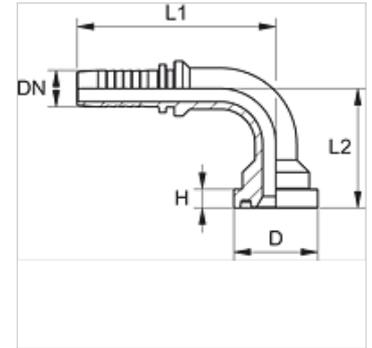

## Note

Choose the appropriate ferrule based on the hose type.

## Ordering information

Seals of NBR

FPM (Viton) on request

## Item

Identification	DN	Size	Inches	Flange size	Operating pressure (bar)	D (mm)	H (mm)	L2 (mm)
PN 13 SF6 90 VA	12	8	1/2"	1/2"	420,0	31,8	7,7	56,0
PN 13 SF6 20 90 VA	12	8	1/2"	3/4"	420,0	41,3	8,8	63,5
PN 16 SF6 20 90 VA	16	10	5/8"	3/4"	420,0	41,3	8,8	63,5
PN 16 SF6 13 90 VA	16	10	5/8"	1/2"	420,0	31,8	7,7	60,0
PN 20 SF6 90 VA	19	12	3/4"	3/4"	420,0	41,3	8,8	70,0
PN 20 SF6 25 90 VA	19	12	3/4"	1"	420,0	47,6	9,5	72,0
PN 25 SF6 90 VA	25	16	1"	1"	420,0	47,6	9,5	78,0
PN 25 SF6 32 90 VA	25	16	1"	1.1/4"	420,0	54,0	10,3	91,0
PN 32 SF6 90 VA	31	20	1.1/4"	1.1/4"	420,0	54,0	10,3	92,0
PN 32 SF6 40 90 VA	31	20	1.1/4"	1.1/2"	420,0	63,5	12,6	95,0
PN 40 SF6 90 VA	38	24	1.1/2"	1.1/2"	420,0	63,5	12,6	104,0
PN 40 SF6 50 90 VA	38	24	1.1/2"	2"	420,0	79,4	12,6	122,0
PN 50 SF6 90 VA	51	32	2"	2"	420,0	79,4	12,6	139,0

## Product versions

PN SF6 90 Swage nipple, SFS angle 90°, Steel