PN SF6 90 VA


Swage nipple, SFS angle 90°

HANSA-FLEX

Properties

Application	Swage nipple for HD 100 to HD 400, KP and TE hoses
Connection 1	SAE flange connection 6000 PSI
Sealing form 1	flat seal with SF O-ring
Short code	SFS
Standard	SAE J518 ISO 6162-2
Material	Stainless steel



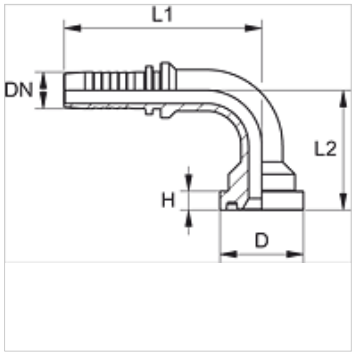

Note

Choose the appropriate ferrule based on the hose type.

Ordering information

Seals of NBR

FPM (Viton) on request

Item

Identification	DN	Size	Inches	Flange size	Operating pressure (bar)	D (mm)	H (mm)	L2 (mm)
PN 13 SF6 90 VA	12	8	1/2"	1/2"	420,0	31,8	7,7	56,0
PN 13 SF6 20 90 VA	12	8	1/2"	3/4"	420,0	41,3	8,8	63,5
PN 16 SF6 20 90 VA	16	10	5/8"	3/4"	420,0	41,3	8,8	63,5
PN 16 SF6 13 90 VA	16	10	5/8"	1/2"	420,0	31,8	7,7	60,0
PN 20 SF6 90 VA	19	12	3/4"	3/4"	420,0	41,3	8,8	70,0
PN 20 SF6 25 90 VA	19	12	3/4"	1"	420,0	47,6	9,5	72,0
PN 25 SF6 90 VA	25	16	1"	1"	420,0	47,6	9,5	78,0
PN 25 SF6 32 90 VA	25	16	1"	1.1/4"	420,0	54,0	10,3	91,0
PN 32 SF6 90 VA	31	20	1.1/4"	1.1/4"	420,0	54,0	10,3	92,0
PN 32 SF6 40 90 VA	31	20	1.1/4"	1.1/2"	420,0	63,5	12,6	95,0
PN 40 SF6 90 VA	38	24	1.1/2"	1.1/2"	420,0	63,5	12,6	104,0
PN 40 SF6 50 90 VA	38	24	1.1/2"	2"	420,0	79,4	12,6	122,0
PN 50 SF6 90 VA	51	32	2"	2"	420,0	79,4	12,6	139,0

Product versions

PN SF6 90	Swage nipple, SFS angle 90°, Steel

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.