PN SF9 90


Swage nipple, SFS-CAT angle 90°

HANSA-FLEX

Properties

Application	Swage nipple for HD 100 to HD 400, KP and TE hoses
Connection 1	SAE flange connection 6000 PSI
Sealing form 1	flat seal with SF O-ring
Short code	SFS-CAT
suitable for	Caterpillar
Material	Steel
Surface	electro galvanised



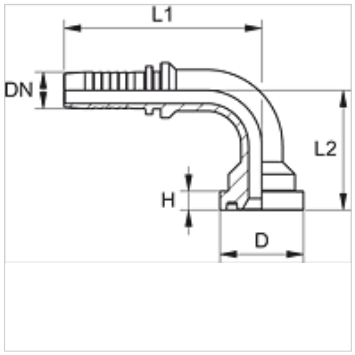

Note

Choose the appropriate ferrule based on the hose type.

Item

Identification	DN	Size	Inches	Flange size	Operating pressure (bar)	D (mm)	H (mm)	L1 (mm)	L2 (mm)
PN 20 SF9 90	19	12	3/4"	3/4"	420,0	41,3	14,6	99,0	66,5
PN 20 SF9 25 90	19	12	3/4"	1"	420,0	47,6	14,6	99,0	71,5
PN 25 SF9 90	25	16	1"	1"	420,0	47,6	14,6	126,0	79,0
PN 25 SF9 32 90	25	16	1"	1.1/4"	420,0	54,0	14,6	126,0	85,5
PN 32 SF9 90	31	20	1.1/4"	1.1/4"	420,0	54,0	14,6	150,5	94,5
PN 32 SF9 40 90	31	20	1.1/4"	1.1/2"	420,0	63,5	14,6	150,5	100,5
PN 40 SF9 90	38	24	1.1/2"	1.1/2"	420,0	63,5	14,6	175,5	110,0

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.