
PN SO
Swage nipple, SO

Properties

Application	Swage nipple for HD 100 to HD 400, KP and TE hoses
Connection 1	Plug-in O port
Material	Steel
Surface	electro galvanised
Standard	



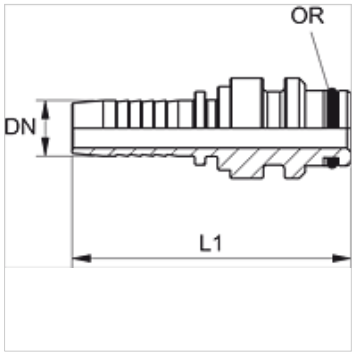

Note
Choose the appropriate ferrule based on the hose type.

Description
Self-aligning to prevent torsional stress.

Item

Identification	DN	Size	Inches	L1 (mm)	OR
PN 06 SO	6	4	1/4"	63,5	6.0 x 2.0
PN 10 SO	10	6	3/8"	65,5	10.0 x 2.0
PN 13 SO	12	8	1/2"	67,0	13.2 x 2.5
PN 16 SO	16	10	5/8"	71,5	16.0 x 2.5
PN 20 SO	19	12	3/4"	78,5	19.0 x 2.5
PN 25 SO	25	16	1"	92,5	25.0 x 2.5
PN 32 SO	31	20	1.1/4"	102,0	33.0 x 2.5
PN 40 SO	38	24	1.1/2"	110,5	40.0 x 3.0
PN 50 SO	51	32	2"	126,0	49.0 x 3.0

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.