
PN WEO S

Swage nipple, WEO S

Properties

Application	Swage nipple for HD 100 to HD 400, KP and TE hoses
Connection 1	WEO plug
Sealing form 1	O-ring sealed pin
Material	Steel
Surface	electro galvanised



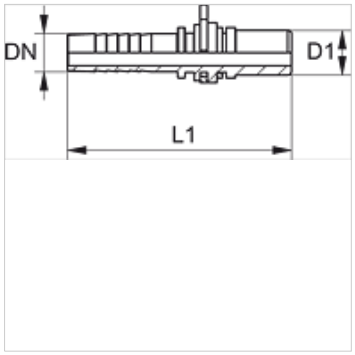

Note

Choose the appropriate ferrule based on the hose type.

Description

Self-aligning to prevent torsional stress.

Item

Identification	DN	Size	Inches	Operating pressure	Size	Ø D1 (mm)	L1 (mm)
PN 04 WEO 10 S	5	3	3/16"	PN 100	3/16"	10,0	54,5
PN 06 WEO 10 S	6	4	1/4"	PN 350	1/4"	10,0	58,0
PN 06 WEO 13 S	6	4	1/4"	PN 350	3/8"	13,0	61,0
PN 08 WEO 13 S	8	5	5/16"	PN 350	3/8"	13,0	61,9
PN 10 WEO 13 S	10	6	3/8"	PN 350	3/8"	13,0	63,0
PN 10 WEO 16 S	10	6	3/8"	PN 350	1/2"	16,0	63,0
PN 13 WEO 16 S	12	8	1/2"	PN 350	1/2"	16,0	64,0
PN 13 WEO 23 S	12	8	1/2"	PN 350	3/4"	23,0	73,5
PN 16 WEO 23 S	16	10	5/8"	PN 350	3/4"	23,0	77,5
PN 20 WEO 23 S	19	12	3/4"	PN 350	3/4"	23,0	82,0
PN 25 WEO 30 S	25	16	1"	PN 250	1"	30,0	100,5

Spare parts

WEO S DEMORING	WEO disassembly ring
WEO S M ANSCHLAG	WEO fitting stop

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.