


PN WEO S 45

Swage nipple, WEO S angle 45°

HANSA FLEX

Properties

Application	Swage nipple for HD 100 to HD 400, KP and TE hoses
Connection 1	WEO plug
Sealing form 1	O-ring sealed pin
Material	Steel
Surface	electro galvanised

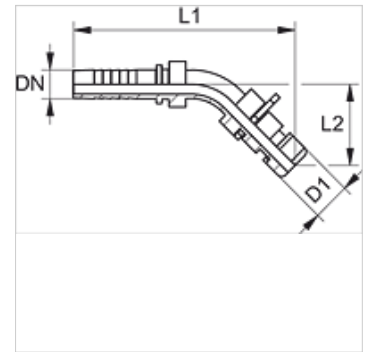

Note

Choose the appropriate ferrule based on the hose type.

Description

Self-aligning to prevent torsional stress.

Item

Identification	DN	Size	Inches	Operating pressure	Size	Ø D1 (mm)	L2 (mm)
PN 06 WEO 10 S 45	6	4	1/4"	PN 350	1/4"	10,0	27,0
PN 06 WEO 13 S 45	6	4	1/4"	PN 350	3/8"	13,0	30,5
PN 08 WEO 13 S 45	8	5	5/16"	PN 350	3/8"	13,0	31,5
PN 10 WEO 13 S 45	10	6	3/8"	PN 350	3/8"	13,0	31,5
PN 10 WEO 16 S 45	10	6	3/8"	PN 350	1/2"	16,0	33,5
PN 13 WEO 16 S 45	12	8	1/2"	PN 350	1/2"	16,0	36,5
PN 13 WEO 23 S 45	12	8	1/2"	PN 350	3/4"	23,0	45,0
PN 16 WEO 23 S 45	16	10	5/8"	PN 350	3/4"	23,0	49,5
PN 20 WEO 23 S 45	19	12	3/4"	PN 350	3/4"	23,0	49,5

Spare parts

WEO S DEMORING	WEO disassembly ring
WEO S M ANSCHLAG	WEO fitting stop