


PN WEO S 45

Swage nipple, WEO S angle 45°

HANSA FLEX

Properties

| | |
|-----------------------|--|
| Application | Swage nipple for HD 100 to HD 400, KP and TE hoses |
| Connection 1 | WEO plug |
| Sealing form 1 | O-ring sealed pin |
| Material | Steel |
| Surface | electro galvanised |

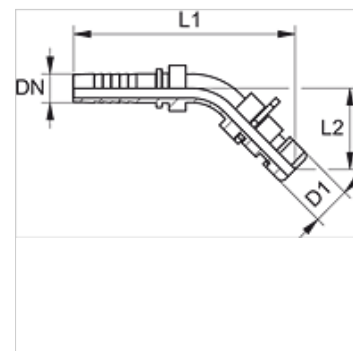

Note

Choose the appropriate ferrule based on the hose type.

Description

Self-aligning to prevent torsional stress.

Item

| Identification | DN | Size | Inches | Operating pressure | Size | Ø D1 (mm) | L2 (mm) |
|-------------------|----|------|--------|--------------------|------|-----------|---------|
| PN 06 WEO 10 S 45 | 6 | 4 | 1/4" | PN 350 | 1/4" | 10,0 | 27,0 |
| PN 06 WEO 13 S 45 | 6 | 4 | 1/4" | PN 350 | 3/8" | 13,0 | 30,5 |
| PN 08 WEO 13 S 45 | 8 | 5 | 5/16" | PN 350 | 3/8" | 13,0 | 31,5 |
| PN 10 WEO 13 S 45 | 10 | 6 | 3/8" | PN 350 | 3/8" | 13,0 | 31,5 |
| PN 10 WEO 16 S 45 | 10 | 6 | 3/8" | PN 350 | 1/2" | 16,0 | 33,5 |
| PN 13 WEO 16 S 45 | 12 | 8 | 1/2" | PN 350 | 1/2" | 16,0 | 36,5 |
| PN 13 WEO 23 S 45 | 12 | 8 | 1/2" | PN 350 | 3/4" | 23,0 | 45,0 |
| PN 16 WEO 23 S 45 | 16 | 10 | 5/8" | PN 350 | 3/4" | 23,0 | 49,5 |
| PN 20 WEO 23 S 45 | 19 | 12 | 3/4" | PN 350 | 3/4" | 23,0 | 49,5 |

Spare parts

| | |
|-------------------------|----------------------|
| WEO S DEMORING | WEO disassembly ring |
| WEO S M ANSCHLAG | WEO fitting stop |