


# PN WEO S 45

Swage nipple, WEO S angle 45°

**HANSA FLEX**

## Properties

<b>Application</b>	Swage nipple for HD 100 to HD 400, KP and TE hoses
<b>Connection 1</b>	WEO plug
<b>Sealing form 1</b>	O-ring sealed pin
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

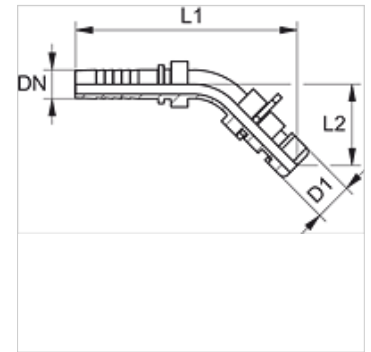

## Note

Choose the appropriate ferrule based on the hose type.

## Description

Self-aligning to prevent torsional stress.

## Item

Identification	DN	Size	Inches	Operating pressure	Size	Ø D1 (mm)	L2 (mm)
PN 06 WEO 10 S 45	6	4	1/4"	PN 350	1/4"	10,0	27,0
PN 06 WEO 13 S 45	6	4	1/4"	PN 350	3/8"	13,0	30,5
PN 08 WEO 13 S 45	8	5	5/16"	PN 350	3/8"	13,0	31,5
PN 10 WEO 13 S 45	10	6	3/8"	PN 350	3/8"	13,0	31,5
PN 10 WEO 16 S 45	10	6	3/8"	PN 350	1/2"	16,0	33,5
PN 13 WEO 16 S 45	12	8	1/2"	PN 350	1/2"	16,0	36,5
PN 13 WEO 23 S 45	12	8	1/2"	PN 350	3/4"	23,0	45,0
PN 16 WEO 23 S 45	16	10	5/8"	PN 350	3/4"	23,0	49,5
PN 20 WEO 23 S 45	19	12	3/4"	PN 350	3/4"	23,0	49,5

## Spare parts

<b>WEO S DEMORING</b>	WEO disassembly ring
<b>WEO S M ANSCHLAG</b>	WEO fitting stop