


# PN WEO S 45

Swage nipple, WEO S angle 45°

**HANSA FLEX**

## Properties

|                       |  |
|-----------------------|--|
| <b>Application</b>    | Swage nipple for HD 100 to HD 400, KP and TE hoses |
| <b>Connection 1</b>   | WEO plug   |
| <b>Sealing form 1</b> | O-ring sealed pin                                  |
| <b>Material</b>       | Steel  |
| <b>Surface</b>        | electro galvanised                                 |

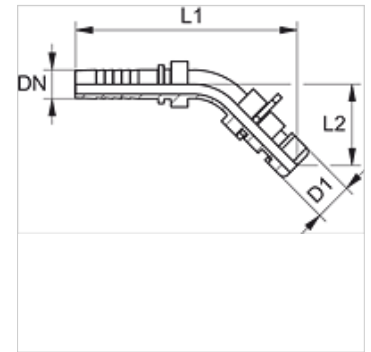

## Note

Choose the appropriate ferrule based on the hose type.

## Description

Self-aligning to prevent torsional stress.

## Item

| Identification    | DN | Size | Inches | Operating pressure | Size | Ø D1 (mm) | L2 (mm) |
|-------------------|----|------|--------|--------------------|------|-----------|---------|
| PN 06 WEO 10 S 45 | 6  | 4    | 1/4"   | PN 350             | 1/4" | 10,0      | 27,0    |
| PN 06 WEO 13 S 45 | 6  | 4    | 1/4"   | PN 350             | 3/8" | 13,0      | 30,5    |
| PN 08 WEO 13 S 45 | 8  | 5    | 5/16"  | PN 350             | 3/8" | 13,0      | 31,5    |
| PN 10 WEO 13 S 45 | 10 | 6    | 3/8"   | PN 350             | 3/8" | 13,0      | 31,5    |
| PN 10 WEO 16 S 45 | 10 | 6    | 3/8"   | PN 350             | 1/2" | 16,0      | 33,5    |
| PN 13 WEO 16 S 45 | 12 | 8    | 1/2"   | PN 350             | 1/2" | 16,0      | 36,5    |
| PN 13 WEO 23 S 45 | 12 | 8    | 1/2"   | PN 350             | 3/4" | 23,0      | 45,0    |
| PN 16 WEO 23 S 45 | 16 | 10   | 5/8"   | PN 350             | 3/4" | 23,0      | 49,5    |
| PN 20 WEO 23 S 45 | 19 | 12   | 3/4"   | PN 350             | 3/4" | 23,0      | 49,5    |

## Spare parts

|                         |                      |
|-------------------------|----------------------|
| <b>WEO S DEMORING</b>   | WEO disassembly ring |
| <b>WEO S M ANSCHLAG</b> | WEO fitting stop     |