


PN WEO SB

Swage nipple, bushing for WEO plug-in connection

HANSA FLEX

Properties

| | |
|-----------------------|--|
| Application | Swage nipple for HD 100 to HD 400, KP and TE hoses |
| Connection 1 | Bushing |
| Sealing form 1 | O-ring sealed |
| Material | Steel |
| Surface | electro galvanised |

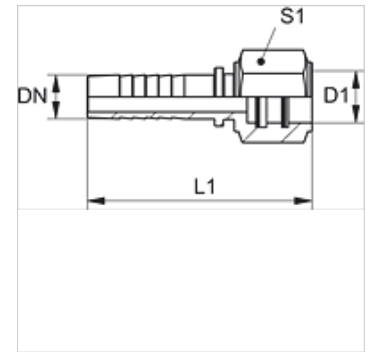

Note

Choose the appropriate ferrule based on the hose type.

Description

Self-aligning to prevent torsional stress.

Item

| Identification | DN | Size | Inches | Operating pressure | Size | Ø D1 (mm) | L1 (mm) | S1 |
|-----------------|----|------|--------|--------------------|------|-----------|---------|----|
| PN 06 WEO 10 SB | 6 | 4 | 1/4" | PN 350 | 1/4" | 10,0 | 62,0 | 19 |
| PN 10 WEO 13 SB | 10 | 6 | 3/8" | PN 350 | 3/8" | 13,0 | 66,0 | 22 |
| PN 13 WEO 16 SB | 12 | 8 | 1/2" | PN 350 | 1/2" | 16,0 | 67,0 | 27 |
| PN 20 WEO 23 SB | 19 | 12 | 3/4" | PN 350 | 3/4" | 23,0 | 87,0 | 32 |
| PN 25 WEO 30 SB | 25 | 16 | 1" | PN 250 | 1" | 30,0 | 105,0 | 41 |

Spare parts

WEO B DISA WEO sealing set