


# SF O-RING V

O-ring, 90SH FKM (FPM)

## Properties

|                   |                    |
|-------------------|--------------------|
| <b>Design</b>     | Rectangular shaped |
| <b>Temp. min.</b> | -15 °C             |
| <b>Temp. max.</b> | 200 °C             |
| <b>Material</b>   | FKM SH 90 (Viton)  |

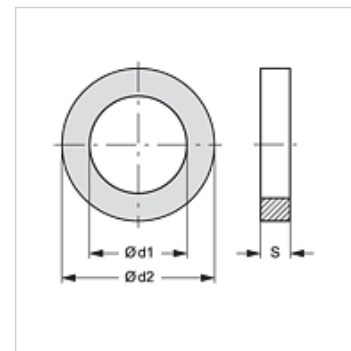

| Item           |     |      |        |              |              |           |
|----------------|-----|------|--------|--------------|--------------|-----------|
| Identification | DN* | Size | Inches | Ø d1<br>(mm) | Ø d2<br>(mm) | S<br>(mm) |
| SF ORING 13 V  | 12  | 8    | 1/2"   | 18,66        | 25,72        | 3,53      |
| SF ORING 20 V  | 19  | 12   | 3/4"   | 24,99        | 32,05        | 3,53      |
| SF ORING 25 V  | 25  | 16   | 1"     | 32,92        | 39,98        | 3,53      |
| SF ORING 32 V  | 31  | 20   | 1.1/4" | 37,70        | 44,76        | 3,53      |
| SF ORING 40 V  | 38  | 24   | 1.1/2" | 47,22        | 54,28        | 3,53      |
| SF ORING 50 V  | 51  | 32   | 2"     | 56,74        | 63,80        | 3,53      |
| SF ORING 60 V  | 60  | 40   | 2.1/2" | 69,45        | 76,51        | 3,53      |
| SF ORING 75 V  | 76  | 48   | 3"     | 85,32        | 92,38        | 3,53      |

## Product versions

SF O-RING PU