

# SIN AB

Swage nipple, DKR

**HANSA FLEX**

## Properties

**Connection 1** BSP nut thread


**Sealing form 1** 60° outer cone

**Short code** DKR

**Standard** ISO 228-1  
ISO 8434-6  
BS 5200

**Material** Steel

**Surface** electro galvanised

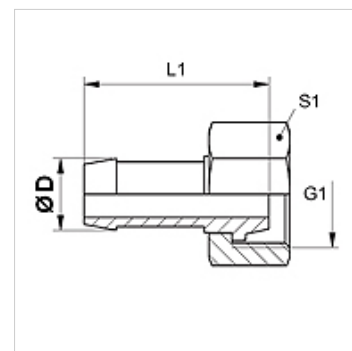

## Note

Choose the appropriate ferrule based on the hose type.

## Item

Identification	DN	Size	Inches	Ø D (mm)	G1
SIN 04 AB	4	3	3/16"	6,0	G 1/8" -28
SIN 04 AB 06	4	3	3/16"	6,0	G 1/4" -19
SIN 06 AB	6	4	1/4"	8,0	G 1/4" -19
SIN 08 AB 10	8	5	5/16"	10,0	G 3/8" -19
SIN 10 AB 13	10	6	3/8"	12,0	G 1/2" -14