# TR FL / TR FS


Drive type nipple, BEL / BES

HANSA-FLEX

## Properties

| | |
|---|---|
| **Connection 1** | Pipe sockets |
| **Sealing form 1** | Cutting ring connection |
| **Short code** | BEL / BES |
| **Standard** | ISO 8434-1 |
| **Material** | Steel |
| **Surface** | electro galvanised |



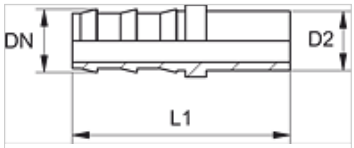


## Note

Final cutting ring assembly must be carried out in the hardened pre-assembly socket (VOM...).

## Item

| Identification | DN | Size | Inches | Series | D2 (mm) | L1 (mm) |
|---|---|---|---|---|---|---|
| **TR 04 FL** | 5 | 3 | 3/16" | L | 6 | 36 |
| **TR 06 FL** | 6 | 4 | 1/4" | L | 8 | 38 |
| **TR 08 FL 06** | 8 | 5 | 5/16" | L | 8 | 45 |
| **TR 08 FL** | 8 | 5 | 5/16" | L | 10 | 47 |
| **TR 10 FL 08** | 10 | 6 | 3/8" | L | 10 | 48 |
| **TR 10 FL** | 10 | 6 | 3/8" | L | 12 | 47 |
| **TR 13 FL** | 12 | 8 | 1/2" | L | 15 | 57 |
| **TR 16 FL** | 16 | 10 | 5/8" | L | 18 | 57 |
| | | | | | | |
| **TR 06 FS** | 6 | 4 | 1/4" | S | 10 | 41 |
| **TR 08 FS** | 8 | 5 | 5/16" | S | 12 | 47 |

## Additional elements

| | |
|---|---|
| **VOM** | Pre-assembly sockets |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*