


TRN HL

Screw nipple, CEL

Properties

| | |
|-----------------------|---------------------------------|
| Connection 1 | metric cylindrical outer thread |
| Sealing form 1 | 24° inner cone |
| Short code | CEL |
| Standard | ISO 8434-1 |
| Material | Steel |
| Surface | electro galvanised |

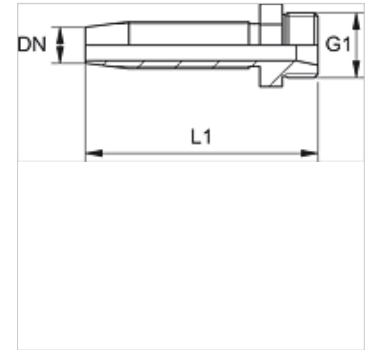

Note

Choose the appropriate ferrule based on the hose type.

Item

| Identification | DN | Size | Inches | Series | G1 | for external pipe Ø (mm) | L1 (mm) | S1 |
|----------------|----|------|--------|--------|------------|-----------------------------|------------|----|
| TRN 04 HL | 5 | 3 | 3/16" | L | M 12 x 1.5 | 6 | 39,5 | 12 |
| TRN 06 HL | 6 | 4 | 1/4" | L | M 14 x 1.5 | 8 | 56,5 | 14 |
| TRN 08 HL | 8 | 5 | 5/16" | L | M 16 x 1.5 | 10 | 59,0 | 17 |
| TRN 08 HL 10 | 8 | 5 | 5/16" | L | M 18 x 1.5 | 12 | 59,0 | 19 |
| TRN 10 HL | 10 | 6 | 3/8" | L | M 18 x 1.5 | 12 | 65,5 | 19 |
| TRN 20 HL | 19 | 12 | 3/4" | L | M 30 x 2 | 22 | 85,0 | 30 |