


# TRP HL

Swage fitting, CEL

## Properties

|                        |                                 |
|------------------------|---------------------------------|
| <b>Connection 1</b>    | metric cylindrical outer thread |
| <b>Sealing form 1</b>  | 24° inner cone                  |
| <b>Short code</b>      | CEL                             |
| <b>Standard</b>        | ISO 8434-1                      |
| <b>Scope of supply</b> | Swage nipple + swage ferrule    |
| <b>Material</b>        | Steel                           |
| <b>Surface</b>         | electro galvanised              |

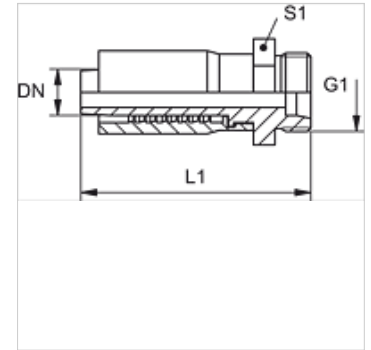

| Item           |    |      |        |        |            |                          |         |    |
|----------------|----|------|--------|--------|------------|--------------------------|---------|----|
| Identification | DN | Size | Inches | Series | G1         | for external pipe Ø (mm) | L1 (mm) | S1 |
| TRP 04 HL      | 5  | 3    | 3/16"  | L      | M 12 x 1.5 | 6                        | 47,0    | 17 |
| TRP 06 HL      | 6  | 4    | 1/4"   | L      | M 14 x 1.5 | 8                        | 53,0    | 17 |
| TRP 08 HL      | 8  | 5    | 5/16"  | L      | M 16 x 1.5 | 10                       | 57,0    | 19 |
| TRP 08 HL 10   | 8  | 5    | 5/16"  | L      | M 18 x 1.5 | 12                       | 57,0    | 22 |
| TRP 10 HL      | 10 | 6    | 3/8"   | L      | M 18 x 1.5 | 12                       | 63,0    | 22 |
| TRP 10 HL 13   | 10 | 6    | 3/8"   | L      | M 22 x 1.5 | 15                       | 64,0    | 27 |
| TRP 13 HL      | 12 | 8    | 1/2"   | L      | M 22 x 1.5 | 15                       | 70,0    | 27 |