


### Properties

|                    |                                  |
|--------------------|----------------------------------|
| Connection 1 - 4   | BSP cylindrical external threads |
| Sealing form 1 - 4 | 60° inner cone                   |
| Design             | Connectors                       |
| Construction       | K shaped                         |
| Material           | Steel                            |
| Surface            | electro galvanised               |

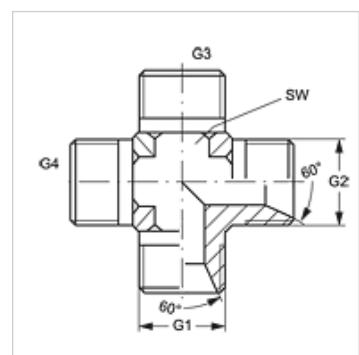

### Item

| Identification | G1 - G4      | AF<br>(mm) |
|----------------|--------------|------------|
| <b>K HB 02</b> | G 1/8" -28   | 11         |
| <b>K HB 04</b> | G 1/4" -19   | 14         |
| <b>K HB 06</b> | G 3/8" -19   | 19         |
| <b>K HB 08</b> | G 1/2" -14   | 22         |
| <b>K HB 10</b> | G 5/8" -14   | 22         |
| <b>K HB 12</b> | G 3/4" -14   | 27         |
| <b>K HB 16</b> | G 1" -11     | 33         |
| <b>K HB 20</b> | G 1 1/4" -11 | 41         |
| <b>K HB 24</b> | G 1 1/2" -11 | 48         |
| <b>K HB 32</b> | G 2" -11     | 64         |

AF = Width across flats

### Product versions

|                |  |
|----------------|--|
| <b>K HB VA</b> | Connector, cross shaped, Stainless steel |
|----------------|--|