



# L HB AB

Screw-in socket, L shaped

**HANSA FLEX**

## Properties

<b>Connection 1</b>	BSP external thread, cylindrical
<b>Sealing form 1</b>	60° inner cone
<b>Connection 2 + 3</b>	BSP nut thread
<b>Sealing form 2 + 3</b>	60° outer cone
<b>Design</b>	Screw-in sockets
<b>Construction</b>	straight
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

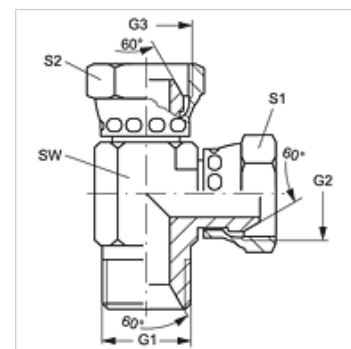

## Item

Identification	G1	G2 + G3	AF (mm)	S1 + S2 (mm)
<b>L HB 04 AB</b>	G 1/4" -19	G 1/4" -19	14	19
<b>L HB 06 AB</b>	G 3/8" -19	G 3/8" -19	19	22
<b>L HB 08 AB</b>	G 1/2" -14	G 1/2" -14	22	27
<b>L HB 12 AB</b>	G 3/4" -14	G 3/4" -14	27	32
<b>L HB 16 AB</b>	G 1" -11	G 1" -11	33	38

SW, S1, S2 = With across flats