

L HB AB

Screw-in socket, L shaped

Properties

Connection 1 BSP external thread, cylindrical

Sealing form 1 60° inner cone

Connection 2 + 3 BSP nut thread


Sealing form 2 + 3 60° outer cone

Design Screw-in sockets

Construction straight

Material Steel

Surface electro galvanised

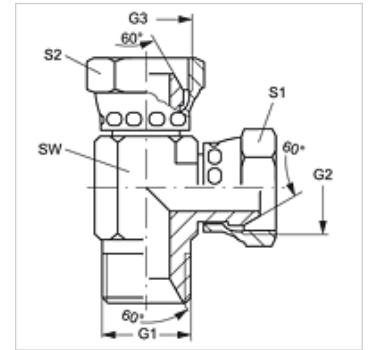

Item

| Identification | G1 | G2 + G3 | AF (mm) | S1 + S2 (mm) |
|-------------------|------------|------------|------------|-----------------|
| L HB 04 AB | G 1/4" -19 | G 1/4" -19 | 14 | 19 |
| L HB 06 AB | G 3/8" -19 | G 3/8" -19 | 19 | 22 |
| L HB 08 AB | G 1/2" -14 | G 1/2" -14 | 22 | 27 |
| L HB 12 AB | G 3/4" -14 | G 3/4" -14 | 27 | 32 |
| L HB 16 AB | G 1" -11 | G 1" -11 | 33 | 38 |

SW, S1, S2 = With across flats