


# L HMO HB

## Screw-in socket, L shaped

### Properties

|                           |                                      |
|---------------------------|--------------------------------------|
| <b>Connection 1</b>       | metric cylindrical outer thread      |
| <b>Sealing form 1</b>     | O-ring seal on screw-in socket       |
| <b>Connection 2 + 3</b>   | BSP cylindrical external threads     |
| <b>Sealing form 2 + 3</b> | 60° inner cone                       |
| <b>Design</b>             | Adjustable direction screw-in socket |
| <b>Construction</b>       | L shaped                             |
| <b>Material</b>           | Steel                                |
| <b>Surface</b>            | electro galvanised                   |

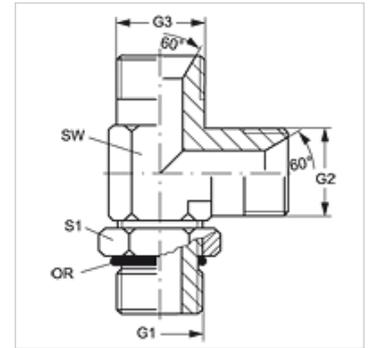

| Item           |            |            |            |    |            |
|----------------|------------|------------|------------|----|------------|
| Identification | G1         | G2 + G3    | AF<br>(mm) | S1 | OR         |
| L HMO 12 HB 02 | M 12 x 1.5 | G 1/8" -28 | 14         | 18 | 9.3 x 2.4  |
| L HMO 12 HB 04 | M 12 x 1.5 | G 1/4" -19 | 14         | 18 | 9.3 x 2.4  |
| L HMO 14 HB 04 | M 14 x 1.5 | G 1/4" -19 | 14         | 20 | 11.3 x 2.4 |
| L HMO 14 HB 06 | M 14 x 1.5 | G 3/8" -19 | 19         | 20 | 11.3 x 2.4 |
| L HMO 16 HB 04 | M 16 x 1.5 | G 1/4" -19 | 19         | 22 | 13.3 x 2.4 |
| L HMO 16 HB 06 | M 16 x 1.5 | G 3/8" -19 | 19         | 22 | 13.3 x 2.4 |
| L HMO 18 HB 06 | M 18 x 1.5 | G 3/8" -19 | 19         | 24 | 15.3 x 2.4 |
| L HMO 18 HB 08 | M 18 x 1.5 | G 1/2" -14 | 19         | 24 | 15.3 x 2.4 |
| L HMO 20 HB 08 | M 20 x 1.5 | G 1/2" -14 | 27         | 28 | 17.3 x 2.4 |
| L HMO 22 HB 08 | M 22 x 1.5 | G 1/2" -14 | 22         | 28 | 19.3 x 2.4 |
| L HMO 22 HB 12 | M 22 x 1.5 | G 3/4" -14 | 22         | 28 | 19.3 x 2.4 |

SW, S1, S2 = With across flats