


# L HMOK HB

Screw-in socket, L shaped

## Properties

<b>Connection 1</b>	metric cylindrical outer thread
<b>Sealing form 1</b>	Thread socket with O-ring + spacer diaphragm ring
<b>Connection 2 + 3</b>	BSP cylindrical external threads
<b>Sealing form 2 + 3</b>	60° inner cone
<b>Design</b>	Adjustable direction screw-in socket
<b>Construction</b>	L shaped
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

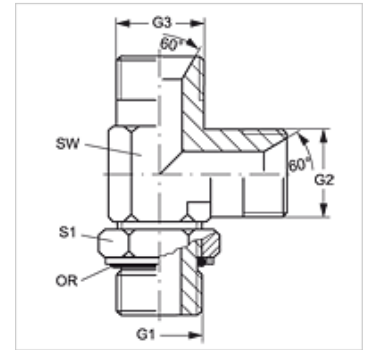

Item					
Identification	G1	G2 + G3	AF (mm)	S1	OR
L HMOK 12 HB 02	M 12 x 1.5	G 1/8" -28	13	18	9.3 x 2.4
L HMOK 12 HB 04	M 12 x 1.5	G 1/4" -19	14	18	9.3 x 2.4
L HMOK 14 HB 04	M 14 x 1.5	G 1/4" -19	14	20	11.3 x 2.4
L HMOK 14 HB 06	M 14 x 1.5	G 3/8" -19	19	20	11.3 x 2.4
L HMOK 16 HB 04	M 16 x 1.5	G 1/4" -19	19	22	13.3 x 2.4
L HMOK 16 HB 06	M 16 x 1.5	G 3/8" -19	19	22	13.3 x 2.4
L HMOK 18 HB 06	M 18 x 1.5	G 3/8" -19	22	24	15.3 x 2.4
L HMOK 18 HB 08	M 18 x 1.5	G 1/2" -14	22	24	15.3 x 2.4
L HMOK 20 HB 08	M 20 x 1.5	G 1/2" -14	22	28	17.3 x 2.4
L HMOK 22 HB 08	M 22 x 1.5	G 1/2" -14	22	28	19.3 x 2.4
L HMOK 22 HB 12	M 22 x 1.5	G 3/4" -14	27	28	19.3 x 2.4

SW, S1, S2 = With across flats

## Spare parts

**KAMMRING M** Diaphragm ring, metric