


L HMOK HJ

Screw-in socket, L shaped

Properties

| | |
|---------------------------|---|
| Connection 1 | metric cylindrical outer thread |
| Sealing form 1 | Thread socket with O-ring + spacer diaphragm ring |
| Connection 2 + 3 | UN/UNF external threads |
| Sealing form 2 + 3 | 74° outer cone |
| Design | Adjustable direction screw-in socket |
| Construction | L shaped |
| Material | Steel |
| Surface | electro galvanised |

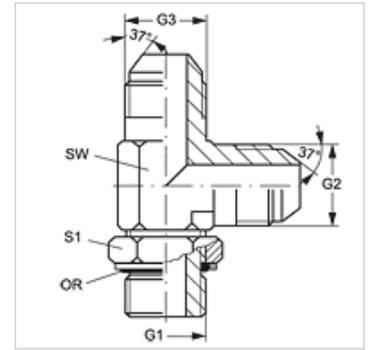

Item

| Identification | G1 | G2 + G3 | AF (mm) | S1 | OR |
|-----------------|------------|----------------|------------|----|--------------|
| L HMOK 10 HJ 04 | M 10 x 1 | 7/16"-20 UNF | 11 | 13 | 8.00 x 1.50 |
| L HMOK 10 HJ 05 | M 10 x 1 | 1/2"-20 UNF | 13 | 14 | 8.00 x 1.50 |
| L HMOK 12 HJ 04 | M 12 x 1.5 | 7/16"-20 UNF | 17 | 14 | 9.25 x 1.78 |
| L HMOK 12 HJ 05 | M 12 x 1.5 | 1/2"-20 UNF | 13 | 17 | 9.25 x 1.78 |
| L HMOK 14 HJ 05 | M 14 x 1.5 | 1/2"-20 UNF | 14 | 17 | 10.82 x 1.78 |
| L HMOK 14 HJ 06 | M 14 x 1.5 | 9/16"-18 UNF | 14 | 17 | 10.82 x 1.78 |
| L HMOK 16 HJ 06 | M 16 x 1.5 | 9/16"-18 UNF | 19 | 17 | 13.46 x 2.08 |
| L HMOK 16 HJ 08 | M 16 x 1.5 | 3/4"-16 UNF | 19 | 19 | 13.46 x 2.08 |
| L HMOK 18 HJ 06 | M 18 x 1.5 | 9/16"-18 UNF | 19 | 17 | 15.54 x 2.62 |
| L HMOK 18 HJ 08 | M 18 x 1.5 | 3/4"-16 UNF | 19 | 22 | 15.54 x 2.62 |
| L HMOK 18 HJ 10 | M 18 x 1.5 | 7/8"-14 UNF | 22 | 24 | 15.54 x 2.62 |
| L HMOK 22 HJ 10 | M 22 x 1.5 | 7/8"-14 UNF | 22 | 27 | 18.77 x 1.78 |
| L HMOK 22 HJ 12 | M 22 x 1.5 | 1.1/16" -12 UN | 27 | 27 | 18.77 x 1.78 |
| L HMOK 27 HJ 12 | M 27 x 2 | 1.1/16" -12 UN | 27 | 32 | 23.47 x 2.62 |
| L HMOK 27 HJ 16 | M 27 x 2 | 1.5/16" -12 UN | 32 | 27 | 23.47 x 2.62 |
| L HMOK 33 HJ 16 | M 33 x 2 | 1.5/16" -12 UN | 33 | 38 | 28.24 x 2.62 |
| L HMOK 42 HJ 20 | M 42 x 2 | 1.5/8" -12 UN | 41 | 50 | 37.77 x 2.62 |
| L HMOK 48 HJ 24 | M 48 x 2 | 1.7/8" -12 UN | 48 | 55 | 44.12 x 2.62 |

SW, S1, S2 = With across flats

Spare parts

KAMMRING M Diaphragm ring, metric