


L HN HJ

Screw-in socket, L shaped

HANSA FLEX

Properties

Connection 1	NPT external threads
Sealing form 1	thread seal
Connection 2 + 3	UN/UNF external threads
Sealing form 2 + 3	74° outer cone
Design	Screw-in sockets
Construction	L shaped
Material	Steel
Surface	electro galvanised

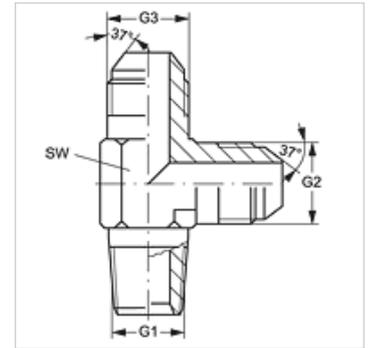

Item

Identification	G1	G2 + G3	AF (mm)
L HN 02 HJ 04	1/8" -27 NPT	7/16"-20 UNF	11
L HN 02 HJ 05	1/8" -27 NPT	1/2"-20 UNF	14
L HN 02 HJ 06	1/8" -27 NPT	9/16"-18 UNF	14
L HN 04 HJ	1/4" -18 NPT	7/16"-20 UNF	14
L HN 04 HJ 05	1/4" -18 NPT	1/2"-20 UNF	14
L HN 04 HJ 06	1/4" -18 NPT	9/16"-18 UNF	14
L HN 06 HJ	3/8" -18 NPT	9/16"-18 UNF	19
L HN 06 HJ 08	3/8" -18 NPT	3/4"-16 UNF	19
L HN 08 HJ	1/2" -14 NPT	3/4"-16 UNF	22
L HN 08 HJ 10	1/2" -14 NPT	7/8"-14 UNF	22
L HN 08 HJ 12	1/2" -14 NPT	1.1/16" -12 UN	27
L HN 12 HJ 10	3/4" -14 NPT	7/8"-14 UNF	27
L HN 12 HJ	3/4" -14 NPT	1.1/16" -12 UN	27
L HN 12 HJ 14	3/4" -14 NPT	1.3/16" -12 UN	33
L HN 12 HJ 16	3/4" -14 NPT	1.5/16" -12 UN	33
L HN 16 HJ	1" -11.5 NPT	1.5/16" -12 UN	33
L HN 20 HJ	1.1/4" -11.5 NPT	1.5/8" -12 UN	41

AF = Width across flats

Product versions

L HN HJ VA Screw-in socket, L shaped, Stainless steel