

# L HRO HJOF

Screw-in socket, L shaped

**HANSA FLEX**

## Properties

**Connection 1** BSP external thread, cylindrical

**Sealing form 1** form G

**Connection 2 + 3** ORFS external threads


**Sealing form 2 + 3** flat seal with O-ring

**Design** Adjustable direction screw-in socket

**Construction** L shaped

**Material** Steel

**Surface** electro galvanised

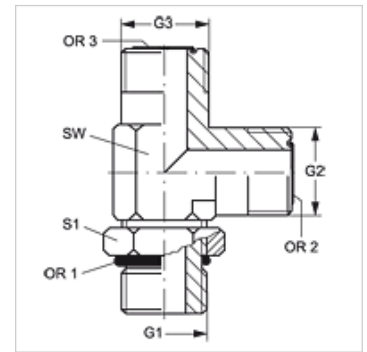

## Item

Identification	G1	G2 + G3	AF (mm)	S1	OR1	OR2 + OR3
<b>L HRO 12 HJOF 10</b>	G 3/4" -14	1" -14 UNS	30	36	23.47 x 2.62	15.60 x 1.78
<b>L HRO 16 HJOF 12</b>	G 1" -11	1.3/16" -12 UN	36	41	29.75 x 3.53	18.77 x 1.78

SW, S1, S2 = With across flats