


L HROK HB

Screw-in socket, L shaped

Properties

| | |
|---------------------------|---|
| Connection 1 | BSP external thread, cylindrical |
| Sealing form 1 | Thread socket with O-ring + spacer diaphragm ring |
| Connection 2 + 3 | BSP cylindrical external threads |
| Sealing form 2 + 3 | 60° inner cone |
| Design | Adjustable direction screw-in socket |
| Construction | L shaped |
| Material | Steel |
| Surface | electro galvanised |

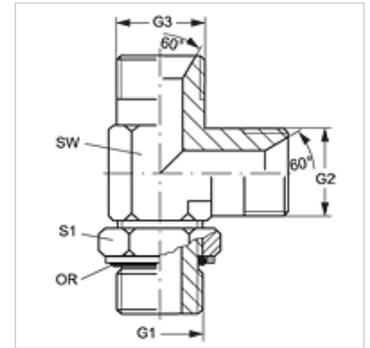

Item

| Identification | G1 | G2 + G3 | AF (mm) | S1 | OR |
|-----------------|--------------|--------------|------------|----|--------------|
| L HROK 02 HB | G 1/8" -28 | G 1/8" -28 | 11 | 16 | 7.65 x 1.78 |
| L HROK 04 HB 02 | G 1/4" -19 | G 1/8" -28 | 14 | 20 | 10.78 x 2.62 |
| L HROK 04 HB | G 1/4" -19 | G 1/4" -19 | 14 | 20 | 10.78 x 2.62 |
| L HROK 04 HB 06 | G 1/4" -19 | G 3/8" -19 | 19 | 20 | 10.78 x 2.62 |
| L HROK 06 HB 04 | G 3/8" -19 | G 1/4" -19 | 19 | 24 | 13.94 x 2.62 |
| L HROK 06 HB | G 3/8" -19 | G 3/8" -19 | 19 | 24 | 13.94 x 2.62 |
| L HROK 06 HB 08 | G 3/8" -19 | G 1/2" -14 | 22 | 24 | 13.94 x 2.62 |
| L HROK 08 HB 06 | G 1/2" -14 | G 3/8" -19 | 22 | 28 | 17.86 x 2.62 |
| L HROK 08 HB | G 1/2" -14 | G 1/2" -14 | 22 | 28 | 17.86 x 2.62 |
| L HROK 08 HB 10 | G 1/2" -14 | G 5/8" -14 | 22 | 28 | 17.86 x 2.62 |
| L HROK 08 HB 12 | G 1/2" -14 | G 3/4" -14 | 27 | 28 | 17.86 x 2.62 |
| L HROK 12 HB 08 | G 3/4" -14 | G 1/2" -14 | 27 | 35 | 23.47 x 2.62 |
| L HROK 12 HB | G 3/4" -14 | G 3/4" -14 | 27 | 35 | 23.47 x 2.62 |
| L HROK 12 HB 16 | G 3/4" -14 | G 1" -11 | 33 | 35 | 23.47 x 2.62 |
| L HROK 16 HB 12 | G 1" -11 | G 3/4" -14 | 33 | 43 | 29.74 x 3.53 |
| L HROK 16 HB | G 1" -11 | G 1" -11 | 33 | 45 | 29.74 x 3.53 |
| L HROK 20 HB 16 | G 1.1/4" -11 | G 1" -11 | 41 | 52 | 37.69 x 3.53 |
| L HROK 20 HB | G 1.1/4" -11 | G 1.1/4" -11 | 41 | 52 | 37.69 x 3.53 |
| L HROK 24 HB | G 1.1/2" -11 | G 1.1/2" -11 | 48 | 58 | 44.04 x 3.53 |

SW, S1, S2 = With across flats

Spare parts

KAMMRING G Spacer diaphragm ring, imperial