


L HROK HJ VA

Screw-in socket, L shaped

Properties

| | |
|---------------------------|---|
| Connection 1 | BSP external thread, cylindrical |
| Sealing form 1 | Thread socket with O-ring + spacer diaphragm ring |
| Connection 2 + 3 | UN/UNF external threads |
| Sealing form 2 + 3 | 74° outer cone |
| Design | Adjustable direction screw-in socket |
| Construction | L shaped |
| Material | Stainless steel |

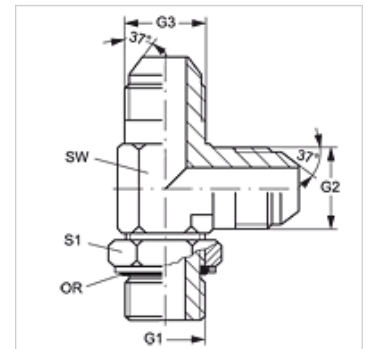

Ordering information

Seals of NBR
FPM (Viton) on request

Item

| Identification | G1 | G2 + G3 | AF (mm) | S1 | OR |
|---------------------------|------------|--------------|------------|----|--------------|
| L HROK 02 HJ 04 VA | G 1/8" -28 | 7/16"-20 UNF | 11 | 14 | 8.00 x 2.00 |
| L HROK 04 HJ 06 VA | G 1/4" -19 | 9/16"-18 UNF | 14 | 19 | 10.77 x 2.62 |

SW, S1, S2 = With across flats

Product versions

L HROK HJ Screw-in socket, L shaped, Steel

Spare parts

KAMMRING G Spacer diaphragm ring, imperial