
# L HROK HJOF

Screw-in socket, L shaped

## Properties

| | |
|---|---|
| **Connection 1** | BSP external thread, cylindrical |
| **Sealing form 1** | Thread socket with O-ring + spacer diaphragm ring |
| **Connection 2 + 3** | ORFS external threads |
| **Sealing form 2 + 3** | flat seal with O-ring |
| **Design** | Adjustable direction screw-in socket |
| **Construction** | L shaped |
| **Material** | Steel |
| **Surface** | electro galvanised |



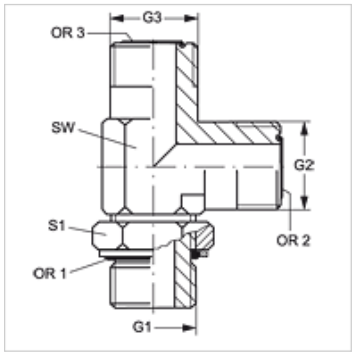


## Item

| Identification | G1 | G2 + G3 | AF (mm) | S1 | OR1 | OR2 + OR3 |
|---|---|---|---|---|---|---|
| **L HROK 02 HJOF 04** | G 1/8" -28 | 9/16"-18 UNF | 14 | 14 | 8.00 x 2.00 | 7.65 x 1.78 |
| **L HROK 04 HJOF** | G 1/4" -19 | 9/16"-18 UNF | 19 | 19 | 10.77 x 2.62 | 7.65 x 1.78 |
| **L HROK 04 HJOF 06** | G 1/4" -19 | 11/16" -16 UN | 19 | 19 | 10.77 x 2.62 | 9.25 x 1.78 |
| **L HROK 06 HJOF** | G 3/8" -19 | 11/16" -16 UN | 19 | 22 | 13.94 x 2.62 | 9.25 x 1.78 |
| **L HROK 06 HJOF 08** | G 3/8" -19 | 13/16" -16 UN | 19 | 22 | 13.94 x 2.62 | 12.42 x 1.78 |
| **L HROK 08 HJOF** | G 1/2" -14 | 13/16" -16 UN | 27 | 27 | 17.86 x 2.62 | 12.42 x 1.78 |
| **L HROK 08 HJOF 10** | G 1/2" -14 | 1" -14 UNS | 27 | 27 | 17.86 x 2.62 | 15.60 x 1.78 |
| **L HROK 12 HJOF 10** | G 3/4" -14 | 1" -14 UNS | 30 | 36 | 23.47 x 2.62 | 15.60 x 1.78 |
| **L HROK 12 HJOF** | G 3/4" -14 | 1.3/16" -12 UN | 30 | 36 | 23.47 x 2.62 | 18.77 x 1.78 |
| **L HROK 16 HJOF 12** | G 1" -11 | 1.3/16" -12 UN | 36 | 41 | 29.75 x 3.53 | 18.77 x 1.78 |
| **L HROK 16 HJOF** | G 1" -11 | 1.7/16" -12 UN | 36 | 41 | 29.75 x 3.53 | 23.52 x 1.78 |
| **L HROK 20 HJOF** | G 1.1/4" -11 | 1.11/16" -12 UN | 41 | 50 | 37.69 x 3.53 | 29.87 x 1.78 |
| **L HROK 24 HJOF** | G 1.1/2" -11 | 2" -12 UN | 50 | 55 | 44.04 x 3.53 | 37.82 x 1.78 |

SW, S1, S2 = With across flats

## Spare parts

| | |
|---|---|
| **KAMMRING G** | Spacer diaphragm ring, imperial |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*