


# L O HJ VA

Screw-in socket, L shaped

## Properties

|                           |                                      |
|---------------------------|--------------------------------------|
| <b>Connection 1</b>       | UN/UNF external threads              |
| <b>Sealing form 1</b>     | O-ring seal on screw-in socket       |
| <b>Connection 2 + 3</b>   | UN/UNF external threads              |
| <b>Sealing form 2 + 3</b> | 74° outer cone                       |
| <b>Design</b>             | Adjustable direction screw-in socket |
| <b>Construction</b>       | L shaped                             |
| <b>Material</b>           | Stainless steel                      |

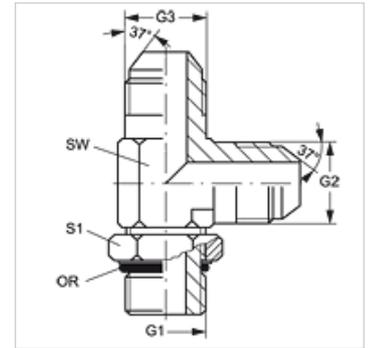

## Ordering information

Seals of NBR  
FPM (Viton) on request

| Item                | G1           | G2 + G3      | AF<br>(mm) | S1 | OR           |
|---------------------|--------------|--------------|------------|----|--------------|
| <b>L O 04 HJ VA</b> | 7/16"-20 UNF | 7/16"-20 UNF | 11         | 14 | 8.92 x 1.83  |
| <b>L O 06 HJ VA</b> | 9/16"-18 UNF | 9/16"-18 UNF | 14         | 17 | 15.40 x 2.10 |

AF = Width across flats

## Product versions

**L O HJ** Screw-in socket, L shaped, Steel