


# L O HJ VA

Screw-in socket, L shaped

## Properties

<b>Connection 1</b>	UN/UNF external threads
<b>Sealing form 1</b>	O-ring seal on screw-in socket
<b>Connection 2 + 3</b>	UN/UNF external threads
<b>Sealing form 2 + 3</b>	74° outer cone
<b>Design</b>	Adjustable direction screw-in socket
<b>Construction</b>	L shaped
<b>Material</b>	Stainless steel

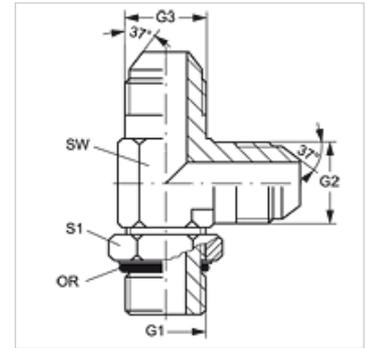

## Ordering information

Seals of NBR  
FPM (Viton) on request

Item	G1	G2 + G3	AF (mm)	S1	OR
<b>L O 04 HJ VA</b>	7/16"-20 UNF	7/16"-20 UNF	11	14	8.92 x 1.83
<b>L O 06 HJ VA</b>	9/16"-18 UNF	9/16"-18 UNF	14	17	15.40 x 2.10

AF = Width across flats

## Product versions

<b>L O HJ</b>	Screw-in socket, L shaped, Steel
---------------	----------------------------------