


T AB

Screw-on socket, T shaped

HANSA FLEX

Properties

| | |
|---------------------------|--------------------------------------|
| Connection 1 - 3 | BSP nut thread |
| Sealing form 1 - 3 | 60° outer cone |
| Design | Adjustable direction screw-on socket |
| Construction | T shaped |
| Material | Steel |
| Surface | electro galvanised |

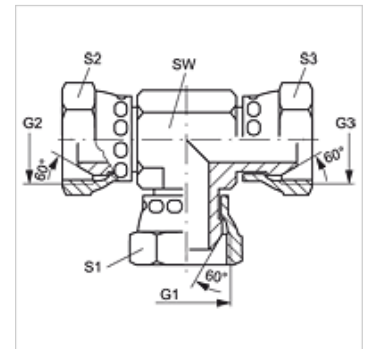

Item

| Identification | G1 - G3 | AF (mm) | S1 - S3 (mm) |
|----------------|--------------|------------|-----------------|
| T AB 02 | G 1/8" -28 | 11 | 14 |
| T AB 04 | G 1/4" -19 | 14 | 19 |
| T AB 06 | G 3/8" -19 | 19 | 22 |
| T AB 08 | G 1/2" -14 | 22 | 27 |
| T AB 10 | G 5/8" -14 | 22 | 30 |
| T AB 12 | G 3/4" -14 | 27 | 32 |
| T AB 16 | G 1" -11 | 33 | 41 |
| T AB 20 | G 1.1/4" -11 | 41 | 50 |
| T AB 24 | G 1.1/2" -11 | 48 | 60 |
| T AB 32 | G 2" -11 | 64 | 70 |

SW, S1, S2 = With across flats

Product versions

| | |
|----------------|--|
| T AB VA | Screw-on socket, T shaped, Stainless steel |
|----------------|--|