


# T AB

Screw-on socket, T shaped

## Properties

|                           |                                      |
|---------------------------|--------------------------------------|
| <b>Connection 1 - 3</b>   | BSP nut thread                       |
| <b>Sealing form 1 - 3</b> | 60° outer cone                       |
| <b>Design</b>             | Adjustable direction screw-on socket |
| <b>Construction</b>       | T shaped                             |
| <b>Material</b>           | Steel                                |
| <b>Surface</b>            | electro galvanised                   |

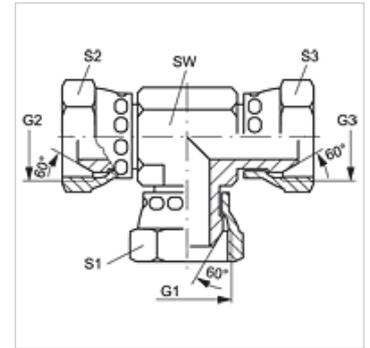

## Item

| Identification | G1 - G3      | AF<br>(mm) | S1 - S3<br>(mm) |
|----------------|--------------|------------|-----------------|
| <b>T AB 02</b> | G 1/8" -28   | 11         | 14              |
| <b>T AB 04</b> | G 1/4" -19   | 14         | 19              |
| <b>T AB 06</b> | G 3/8" -19   | 19         | 22              |
| <b>T AB 08</b> | G 1/2" -14   | 22         | 27              |
| <b>T AB 10</b> | G 5/8" -14   | 22         | 30              |
| <b>T AB 12</b> | G 3/4" -14   | 27         | 32              |
| <b>T AB 16</b> | G 1" -11     | 33         | 41              |
| <b>T AB 20</b> | G 1.1/4" -11 | 41         | 50              |
| <b>T AB 24</b> | G 1.1/2" -11 | 48         | 60              |
| <b>T AB 32</b> | G 2" -11     | 64         | 70              |

SW, S1, S2 = With across flats

## Product versions

**T AB VA** Screw-on socket, T shaped, Stainless steel