


T AB HB

Screw-on socket, T shaped

HANSA FLEX

Properties

| | |
|---------------------------|--------------------------------------|
| Connection 1 | BSP nut thread |
| Sealing form 1 | 60° outer cone |
| Connection 2 + 3 | BSP cylindrical external threads |
| Sealing form 2 + 3 | 60° inner cone |
| Design | Adjustable direction screw-on socket |
| Construction | T shaped |
| Material | Steel |
| Surface | electro galvanised |

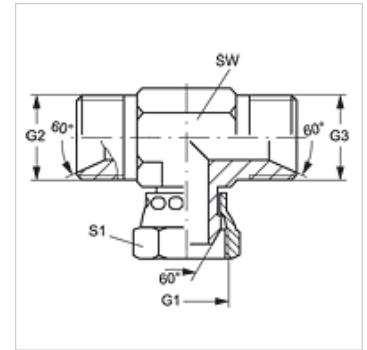

Item

| Identification | G1 | G2 + G3 | AF (mm) | S1 |
|-------------------|--------------|--------------|------------|----|
| T AB 04 HB | G 1/4" -19 | G 1/4" -19 | 14 | 19 |
| T AB 06 HB | G 3/8" -19 | G 3/8" -19 | 17 | 22 |
| T AB 08 HB | G 1/2" -14 | G 1/2" -14 | 22 | 27 |
| T AB 10 HB | G 5/8" -14 | G 5/8" -14 | 24 | 30 |
| T AB 12 HB | G 3/4" -14 | G 3/4" -14 | 27 | 32 |
| T AB 16 HB | G 1" -11 | G 1" -11 | 36 | 41 |
| T AB 20 HB | G 1.1/4" -11 | G 1.1/4" -11 | 46 | 50 |
| T AB 24 HB | G 1.1/2" -11 | G 1.1/2" -11 | 50 | 55 |

SW, S1, S2 = With across flats

Product versions

T AB HB VA Screw-on socket, T shaped, Stainless steel