


T AB HB VA

Screw-on socket, T shaped

HANSA**FLEX**

Properties

| | |
|--------------------|--------------------------------------|
| Connection 1 | BSP nut thread |
| Sealing form 1 | 60° outer cone |
| Connection 2 + 3 | BSP cylindrical external threads |
| Sealing form 2 + 3 | 60° inner cone |
| Design | Adjustable direction screw-on socket |
| Construction | T shaped |
| Material | Stainless steel |

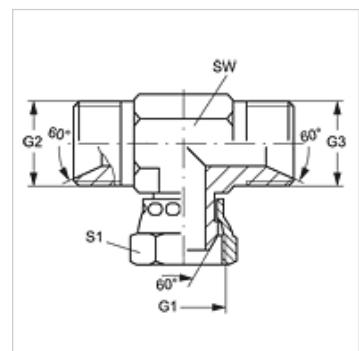

Item

| Identification | G1 | G2 + G3 | AF (mm) | S1 |
|----------------------|--------------|--------------|------------|----|
| T AB 02 HB VA | G 1/8" -28 | G 1/8" -28 | 12 | 14 |
| T AB 04 HB VA | G 1/4" -19 | G 1/4" -19 | 14 | 19 |
| T AB 06 HB VA | G 3/8" -19 | G 3/8" -19 | 17 | 22 |
| T AB 08 HB VA | G 1/2" -14 | G 1/2" -14 | 19 | 27 |
| T AB 12 HB VA | G 3/4" -14 | G 3/4" -14 | 27 | 32 |
| T AB 16 HB VA | G 1" -11 | G 1" -11 | 36 | 41 |
| T AB 20 HB VA | G 1.1/4" -11 | G 1.1/4" -11 | 41 | 50 |
| T AB 24 HB VA | G 1.1/2" -11 | G 1.1/2" -11 | 50 | 55 |

SW, S1, S2 = With across flats

Product versions

T AB HB Screw-on socket, T shaped, Steel